

BALL VALVES

0609EN December 2013

STANDARD PORT BALL VALVE, SPECIFIC FOR THE CONNECTION OF THE COUNTERS.
FOR PLUMBING SYSTEMS. R254P SERIES



GIACOMINI
WATER E-MOTION



R254P

Description

Ball valve with male-female connections with fixed nut and gasket. Specific for the connection of the counters. For plumbing systems. Chrome-plated brass or brass finish. Standard port. Steel lever handle (red).

Versions and product codes

Product code	Size	Version	Use	Handle color
R254PX004	3/4"M x 3/4"F nut	Chrome-plated	Plumbing systems	Red
R254PY003	1/2"M x 3/4"F nut	Brass finish		
R254PY004	3/4"M x 3/4"F nut			

Technical data

Main features and materials

- Suitable for plumbing, gas and liquid hydrocarbon systems.
- Connections: F x F nut (ISO 228)
- Standard port.
- UNI EN 12165 CW617N chrome-plated or brass finish valve.
- Stem with double O-ring.
- Nut with anti-corrosion coating, with guarantee seal and hologram.
- Steel lever handle (red), with pvc anti-corrosion coating.
- Asbestos-free fiber gasket.


Field of applications

- Max. working pressure at 20 °C with water and not dangerous gas: 4,2 MPa (42 bar) for 1/2" - 3/4"
- Minimum working temperature: -20 °C with 50 % glycol solutions
- Max. working conditions with dry saturated steam: 185 °C with 1,05 MPa (10,5 bar)

Valves Kv

Size	Kv
1/2"	10,2
3/4"	18,5

Dimensions

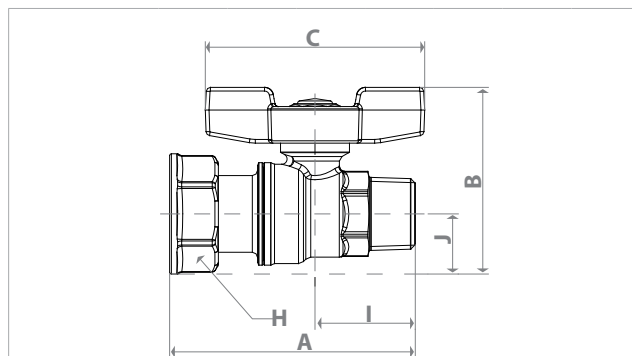

Size	DN	A [mm]	I [mm]	B [mm]	J [mm]	C [mm]	H [mm]
1/2"M x 3/4"F nut	14	71	29	54	18	63	30
3/4"M x 3/4"F nut	14	75	35	54	18	63	30

Product specifications

R254P

Ball valve with male-female connections with fixed nut and asbestos-free fiber gasket. For plumbing systems. UNI EN 12165 CW617N chrome-plated brass or brass finish. Standard port. Steel lever handle (red), with pvc anti-corrosion coating. Stem with double O-ring. Nut with anti-corrosion coating, with guarantee seal and hologram. Max. working pressure at 20 °C with water and not dangerous gas: 4,2 MPa (42 bar) for 1/2" - 3/4". Minimum working temperature: -20 °C with 50 % glycol solutions. Max. working conditions with dry saturated steam: 185 °C with 1,05 MPa (10,5 bar).


BALL VALVES

0609EN December 2013

STANDARD PORT BALL VALVE, SPECIFIC FOR THE CONNECTION OF THE COUNTERS.
FOR PLUMBING SYSTEMS. R254P SERIES



GIACOMINI
WATER E-MOTION

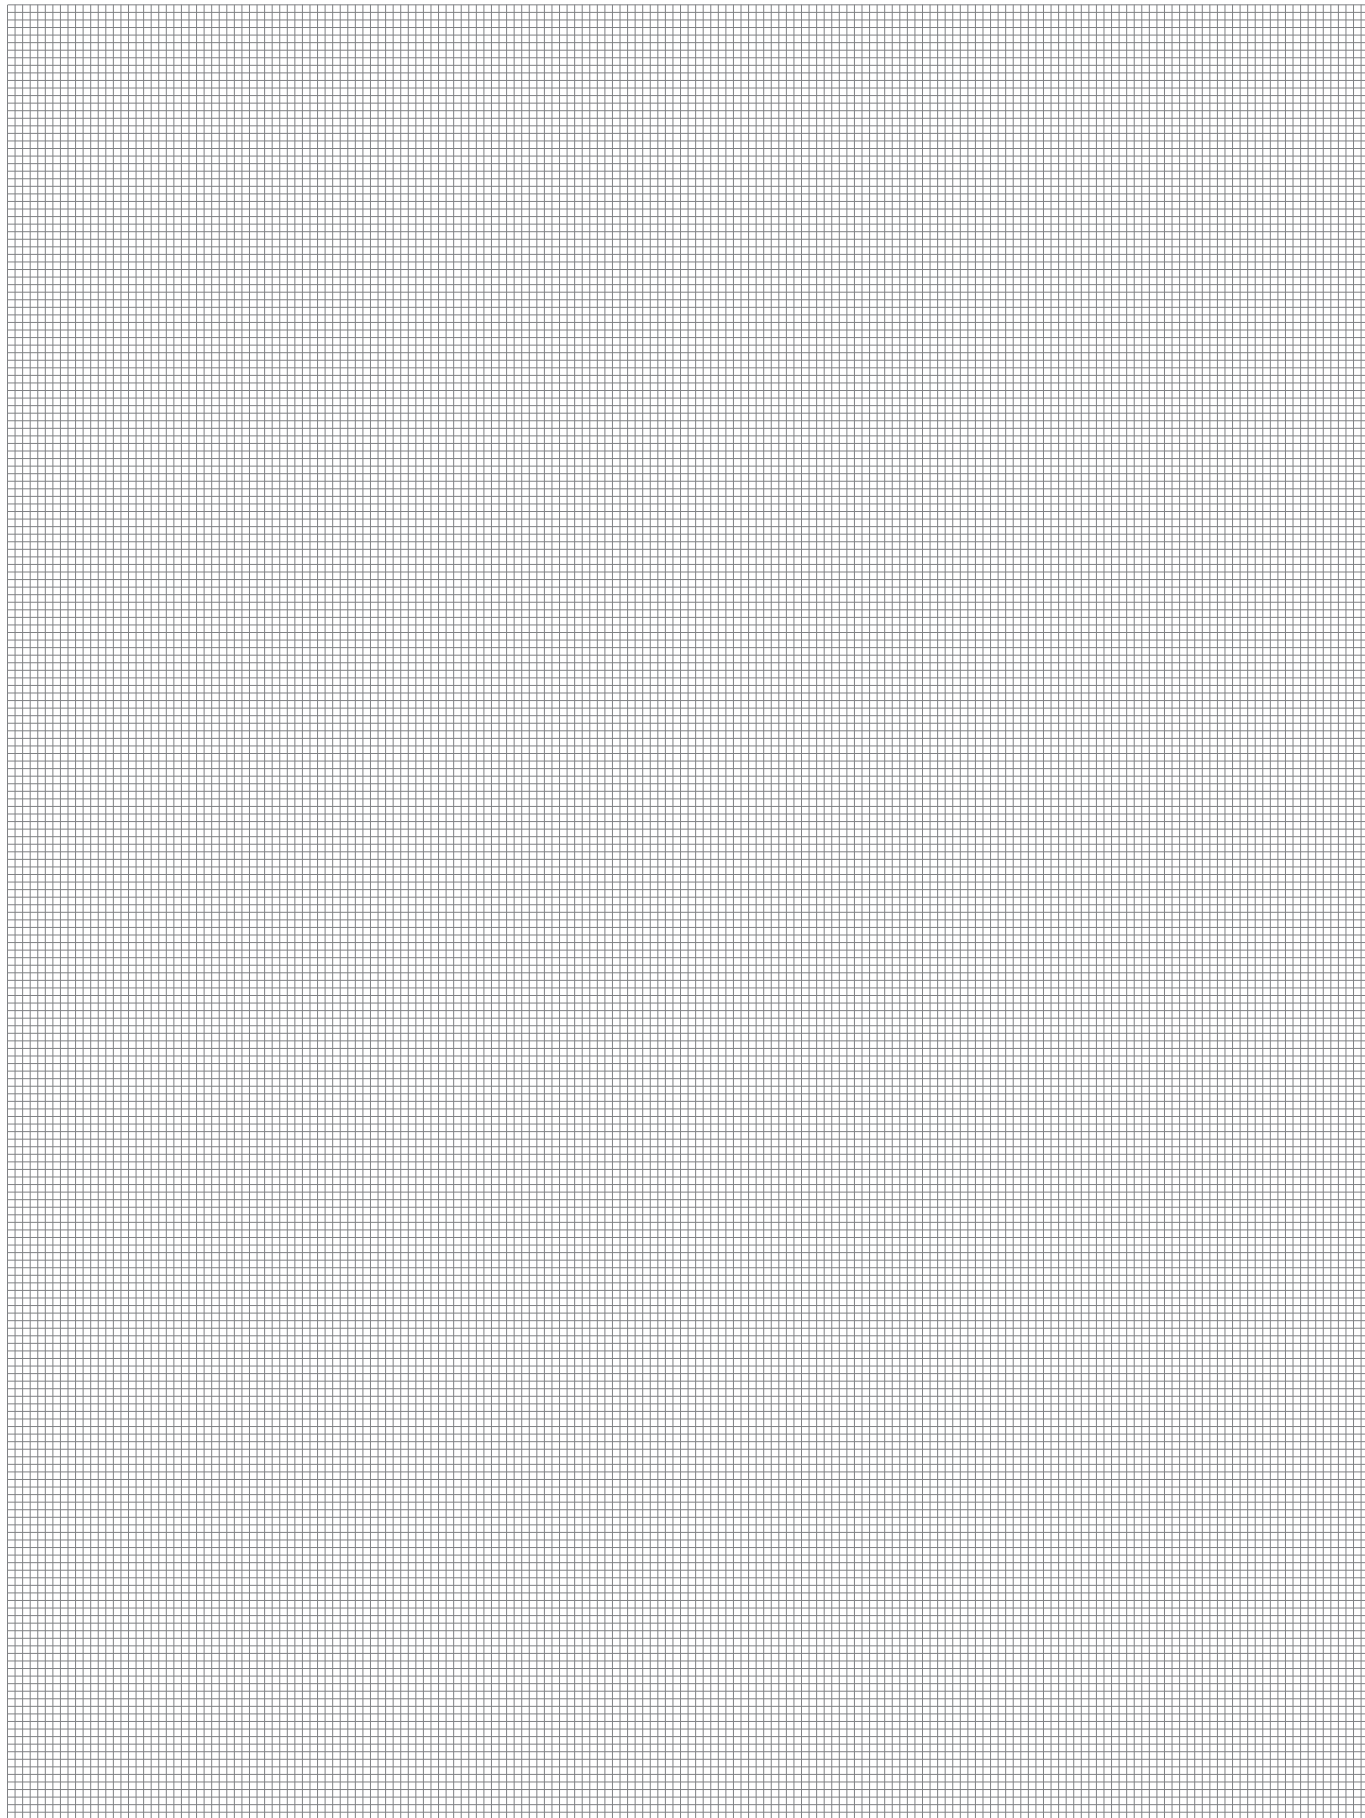

Additional information

For additional information please check the website www.giacomini.com or contact the technical service: ☎ +39 0322 923372 📠 +39 0322 923255 ✉ consulenza.prodotti@giacomini.com
This pamphlet is merely for information purposes. Giacomini S.p.A. retains the right to make modifications for technical or commercial reasons, without prior notice, to the items described in this pamphlet. The information described in this technical pamphlet does not exempt the user from following carefully the existing regulations and norms on good workmanship.
Giacomini S.p.A. Via per Alzo, 39 - 28017 San Maurizio d'Opaglio (NO) Italy