


RADIANT CEILING SYSTEMS
giacomini

Product catalogue

METALLIC

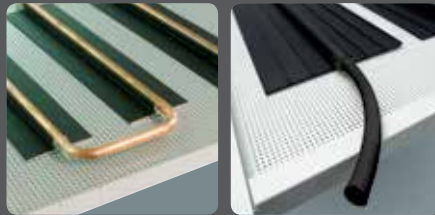


GK AND GK PSV SERIES

SUMMARY

- ▶ 2. INTRODUCTION
- ▶ 2. GIACOKLIMA® RADIANT CEILING SYSTEM
- ▶ 6. ACTIVE PANEL
- ▶ 6. SUPERFICIAL FINISHING
- ▶ 6. EASE OF INSPECTION
- ▶ 7. INTEGRATION OF OTHER SYSTEMS
- ▶ 7. CUSTOMIZATION
- ▶ 8. GK SERIES RADIANT CEILING
- ▶ 10. GK60 SERIES RADIANT CEILING – PARALLEL STRUCTURE
- ▶ 20. GK120 SERIES RADIANT CEILING – CROSSED STRUCTURE
- ▶ 30. GK PSV SERIES RADIANT CEILING
- ▶ 32. GK60X60 PSV SERIES RADIANT CEILING
- ▶ 38. GK60X120 PSV SERIES RADIANT CEILING
- ▶ 44. DIMENSIONS
- ▶ 45. STANDARD CONFIGURATION EXAMPLE FOR GK60 SERIES
- ▶ 46. STANDARD CONFIGURATION EXAMPLE FOR GK120 SERIES
- ▶ 47. STANDARD CONFIGURATION EXAMPLE FOR GK60X60 PSV SERIES
- ▶ 48. STANDARD CONFIGURATION EXAMPLE FOR GK60X120 PSV SERIES
- ▶ 49. PRODUCT CODE INDEX
- ▶ 56. GIACOMINI'S REPRESENTATIVES IN THE WORLD
- ▶ 58. GENERAL SALE CONDITIONS
- ▶ 59. QUALITY CERTIFICATIONS
- ▶ 60. FURTHER INFORMATION



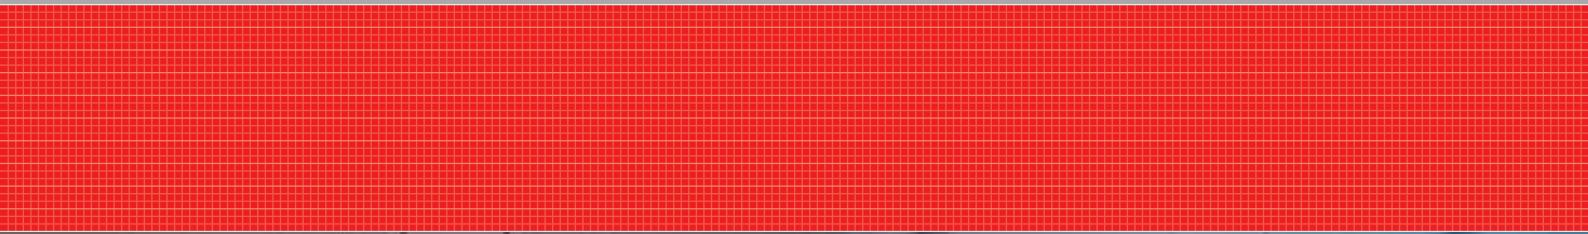

Introduction



The modern buildings represent a demanding challenge for the design and execution professionals; the complex requirements that arise can be satisfied only really innovative solutions. The purchasers request buildings maintaining their value during the time, guaranteeing low running costs and that can be used with flexibility, given the frequent reconfiguration requirements of the internal spaces. The architects search aesthetically valuable and highly functional solutions, desire having large freedom in the space exploitation and consider a bond those conditioning system ends that take away useful surface. The thermotechnical designers are oriented towards performance and silent conditioning systems that result as the most convenient not as on purchase, but on the span of the entire useful lifetime.

giacoklima® radiant ceiling system

In a so exigent scene, giacoklima® radiant ceiling presents itself as a simple, rational and innovative solution for the building air conditioning, able to satisfy at its best's the most different requirements; a system capitalizing Giacomini's long experience and the well-established know-how in the manufacture of components and systems for heating and conditioning distribution. For the thermal exchange with the room, the radiant ceiling exploits the radiation transmission, therefore it brings to temperature the casing instead of the air and the only convective effect is that natural. This way there are no perceivable draughts and there is no dust circulation. The large surface of the radiant false ceiling permits a high thermal energy exchange between active surfaces and the room, maintaining very limited temperature differences. With an only system, it is possible heating and cooling buildings, but the system is invisible, as it is integrated into the metallic false ceiling, available in various modules, colours and superficial finishings.



High output, low thermal inertia, great energy efficiency and no maintenance are the factors that convince more the technicians; high comfort, working inexpensiveness, valuable aesthetic and large flexibility in the space exploitation are particularly appreciated by the users.. *giacoklima*® is the ideal solutions for offices, schools, commercial and show-room, airports, hall, conference rooms and, in general, for all buildings where high comfort and consistent energy saving is requested.



Due to the supply temperature of the radiant ceiling, less extreme compared to that one requested by the traditional systems – either in heating or in cooling – and closest to the room temperature, it is possible fully exploiting the potential of energy saving offered by technical solutions at the cutting edge and renewable energy sources. The result is a marked reduction of the CO₂ emissions and a minimization of the impact on the environment, without renouncing to a high comfort. The radiant ceiling turns out to be ideal in combination with last generation high efficiency generators as condensation boilers. The use of heat pumps is particularly favourable that allows exploiting the free and inexhaustible heat present in the air, in the water or in the ground limiting at the most the recourse to fossil fuels. In summer for the



cooling of the rooms it is possible using a geothermal system giving up the room heat to the underground by means of landfilled manifolds or depth sensor. In the intermediate seasons, the energy captured and stored by the solar thermal system, prescribed by now in all new constructions, can be used to integrate efficaciously the low temperature heating.





giacoklima® radiant ceiling system

The invisible system to heat in winter and cool in summer



Comfort



giacoklima® radiant ceiling system ensure a climate always ideal and a comfort remarkably higher compared to the traditional systems. The air temperature is constant and uniform in the various rooms either vertically or horizontally; the correct temperature difference between the building inside and outside avoids health problems caused by a too pushed summer conditioning; the radiant exchange eliminates the irritating draughts and the dust circulation: the absence of parts in motion makes the room absolutely silent.

Energy saving



The impact energy of giacoklima® radiant ceiling system is more contained compared to the traditional conditioning system thanks to the supply water temperatures of the circuits which are less extreme either in winter or in summer; a factor that makes it is ideal in combination with high efficiency generators as the condensation boilers and renewable sources as the geothermal and the solar thermal systems, The radiant ceiling represents the more suitable system for those high energy efficiency buildings that directives and norms nowadays require.



Giacomini system

Choosing Giacomini means relying upon an Italian company world leader in the sector of components and systems for heating, cooling, and sanitary distribution that can boast a long experience and thousands of references made with giacoklima® radiant ceiling system with the certainty of a product designed and made entirely in Italy.



Invisible system



With giacoklima® radiant ceiling system, the heating and cooling plant results absolutely invisible, as it is integrated into the metallic false ceiling usually already expected as room finishing in big buildings. The elimination of the system terminals from the internal spaces allows recovering useful space and it ensures the maximum design and architectural freedom in each situation.

Modularity and ease of inspection



The series of giacoklima® metallic panels allows making radiant false ceilings according to the most widespread standard modularity on the market and satisfies the requirements of designers and architects; on demand panels having out of standard dimensions are available. The panels can be removed and brought vertically to reach the area above the ceiling and effect inspection and maintenance operations without stopping the system.

Active panel



The central element of the *giacoklima*® ceiling system is represented by the active panel. It is made of robust steel and characterized by a long length due to the protection by means of zinc plating, the panel is available in various dimensions to obtain the most diffused modularity of the common metallic false ceilings. The activation is made by means of thermal diffusers in anodized aluminium that are factory glued to the panel; in order to satisfy different applications, you can choose between two activation types characterized by

different values of thermal output. According to the activation type, the hydraulic circuits crossed by the thermovector fluid can be made of copper or plastic material. On the upper part of the panels, a polyester panel having thermal insulation function can be laid down.

Superficial finishing



Each active *giacoklima*® panel is available in microperforated and plain version. The microperforation has not only an aesthetic function but it improves sensibly the acoustic comfort in those working rooms with many persons – as open-space offices – due to its optimal sound absorbing characteristics.

Moreover it can be used to spread in room the primary air uniformly and at a very low speed with great comfort advantages.

Ease of inspection



giacoklima® radiant ceiling can be opened at any time to have free access to the systems positioned in the plenum and effect maintenance interventions. The panels can be brought in vertical position also with working system; according to the versions, they can rotate around the carrying structure where they are coupled or remain hanged to the structure by means of appropriate metallic cables, after being removed from their seat. Traction on the connection pipes is never exercised.

Integration of other systems



All giacoklima® radiant ceiling types allow easily integrating the components of other systems that shall be turned in room, as lights, air diffusers or loudspeakers. Inactive panels of various dimensions are available. They have a preblanking avoiding boring or breaking on the working site; the choice of standard modules permits also using market standard appliances and terminals simply in place of inactive panels. For the installation of components having contained dimensions, as smoke/fire alarms or presence sensors, it is possible exploiting also the carrying elements.

Customization


giacoklima® radiant ceiling offers numerous standard versions and in addition to this, on demand and for minimum quantities, it can be customized concerning the modules, the colour (RAL range), the opening method or the material type.



Material customization:
STAINLESS STEEL version
(for GK120 version only)

Structure customization:
Version with hidden structure
(for GK and GK PSN)

Colour customization:
choice inside RAL range
(for GK, GK PSV and GK PSN)

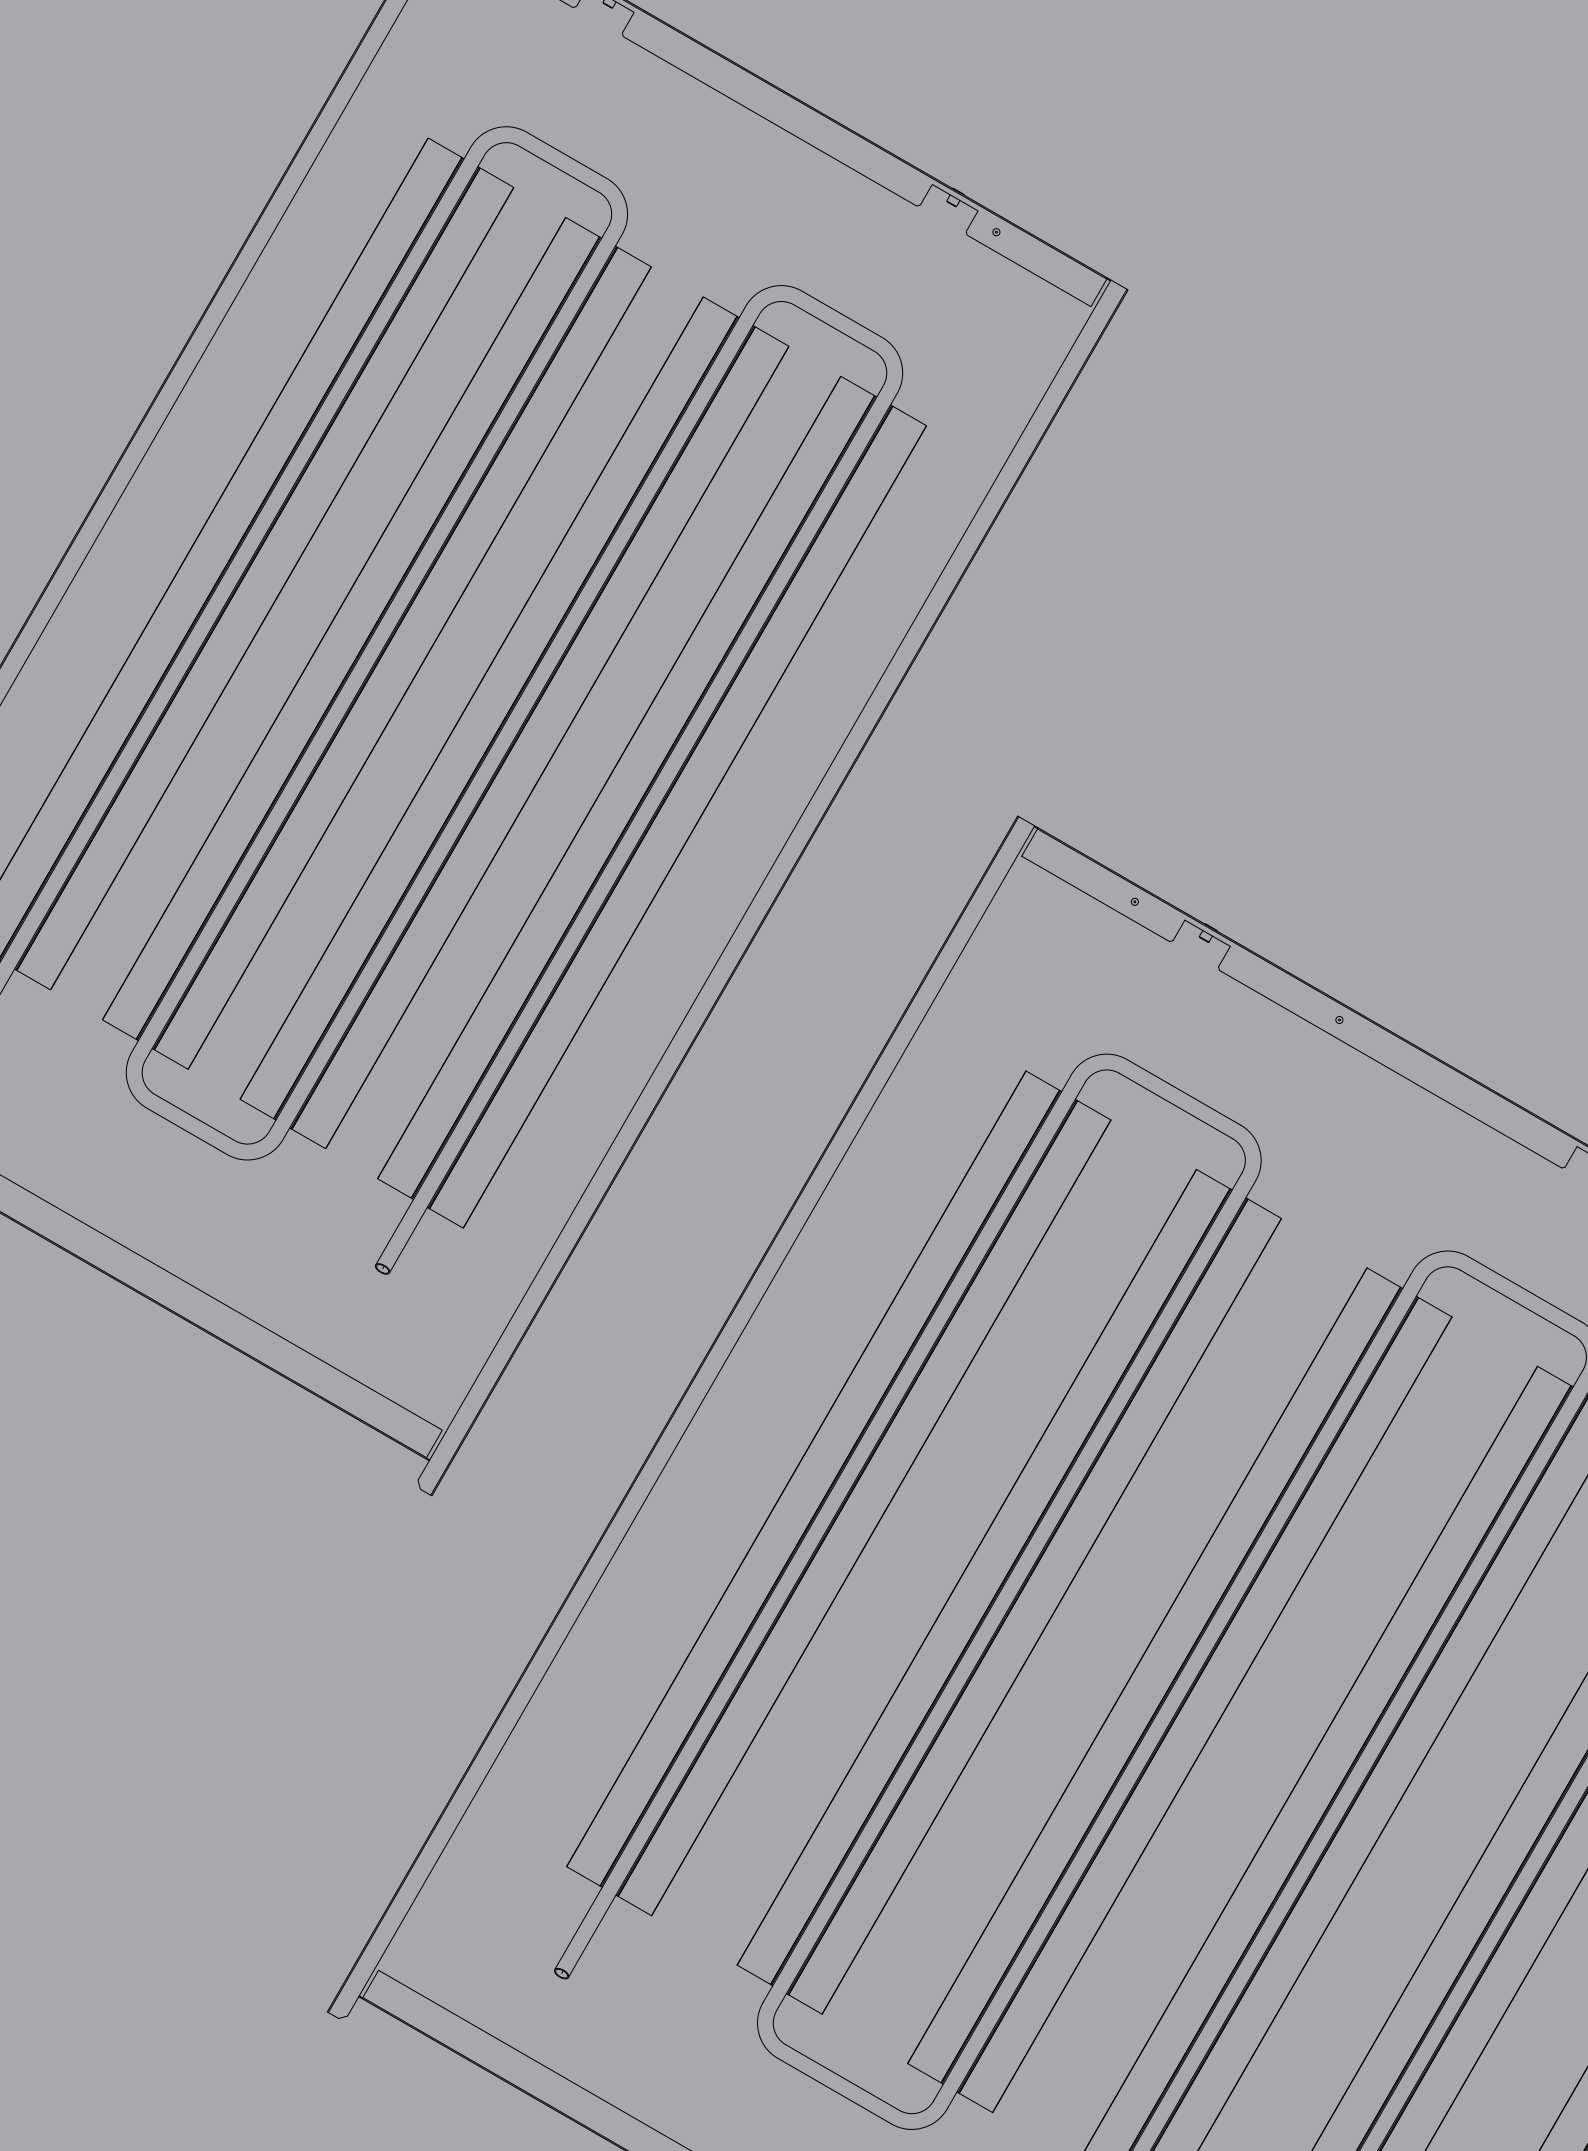

GK SERIES RADIANT CEILING

GK60 and GK120 SERIES


giacoklima® GK is a radiant modular false ceiling system particularly suitable for the heating and cooling of offices, hospitals, airports, commercial rooms, schools and service sector buildings in general. From the construction point of view, the system is composed by active and inactive steel sheet panels, steel sheet carrying elements and a suspension system by means of rigid hangers that permit obtaining a perfect flatness and horizontality of the false ceiling. The system allows a false ceiling with two different modules*: 600x1200 mm (GK60, parallel structure) and 1200 x 1200 mm (GK120, crossed structure). Two types of activation (C and A) of your choice permit satisfying different thermal output requirements.

It is possible easily integrating the components of other systems that shall be turned in room – as for example lights or air diffusers – due to inactive panels having an appropriate preblanking, without making boring or breaking. Easy and rapid to be installed, GK radiant false ceiling can be opened any time to have free access to the systems placed in the plenum and make maintenance operations. The availability of the micropunched panels is particularly useful to exploit the plenum for the delivery of the renewal dehumidified air or to make the room acoustics better thanks to the high sound-absorbing power. A proper thermo acoustic panel made of polyester fibre, can be placed on the upper part of the panels when a thermal insulation is needed upwards or to increase the acoustic performance.

() On demand, and for minimum quantities, also 300x1200 mm (GK30, parallel structure)*

GK60 SERIES - Parallel structure

Page 10

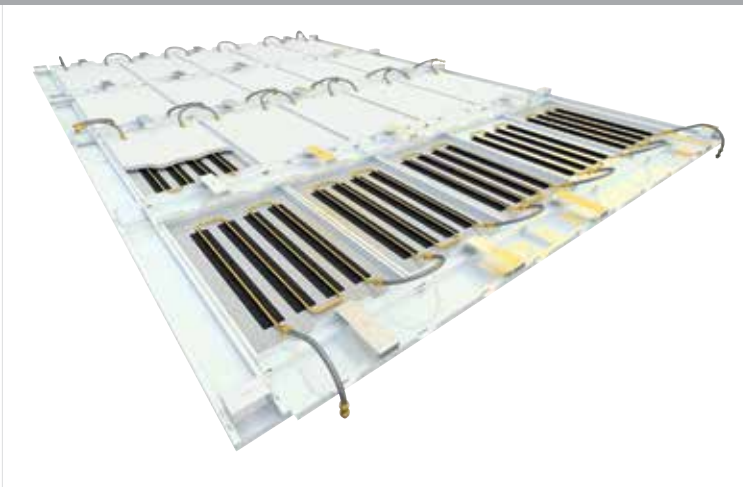


GK120 SERIES - Crossed structure

Page 20



K60

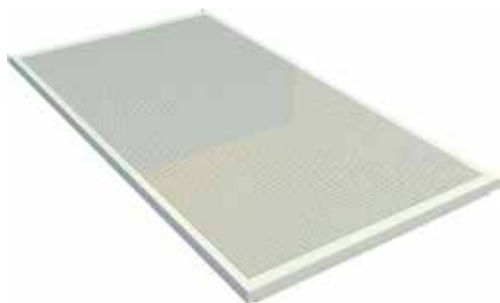

K60 (micropunched)



K60L (plain)

K60 is a steel sheet panel for laying on parallel structure at sight that permits making a modular false ceiling size 600x1200 mm. K60 is an inactive panel; it has no thermal diffusers and serves to complete the active surface made with K60C or K60A panels. Plain and micropunched versions are available; the last has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width (16% boring percentage). Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Two safety springs keep the panel on seat and permit the opening and the closing. The K60 panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.


The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features


- 0,8 mm zinc coated steel sheet
- Stove enamelled
- For false ceilings module 600x1200 mm
- Inactive (without thermal diffusers)
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- 596x1030 mm panel dimensions

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K60X501	R2516 micropunched	RAL9010 white	2	600 x 1200	596 x 1030
K60LX501	plain	RAL9010 white	2	600 x 1200	596 x 1030
K60X701	R2516 micropunched	RAL9006 silver	2	600 x 1200	596 x 1030
K60LX701	plain	RAL9006 silver	2	600 x 1200	596 x 1030

K60C

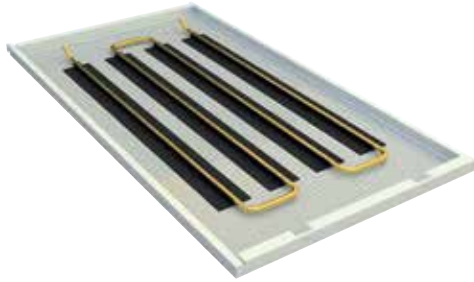

K60C (micropunched)

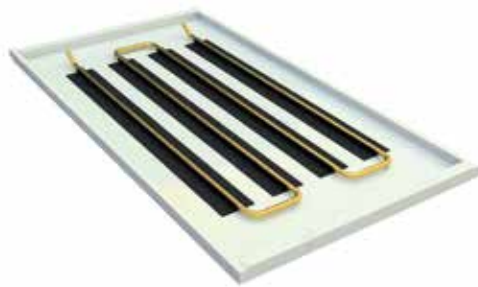

K60LC (plain)

K60C is a steel sheet panel for laying on parallel structure at sight that permits making a modular false ceiling of 600x1200mm.

K60c panel is an active panel; it has 4 thermal diffusers in anodized aluminium of 75 mm width, glued on panels in the factory. The hydraulic circuit is made by through copper serpentine with 12x1 mm pipe.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width (16% boring percentage).

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Two safety springs keep the panel on seat and permit the opening and the closing. The K60 panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,8 mm zinc coated steel sheet
- Stove enamelled
- For false ceilings module 600x1200 mm
- Type C activation
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- $K_p = 0,86$ (with capacity in l/h and loss of pressure in mm w.c.)
- 596x1030 mm panel dimensions

Nominal outputs

- Cooling (according to EN14240): 96,9 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 87,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.

For further information about K60C panel, consult also the Technical Sheet 0348EN

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K60CX501	R2516 micropunched	RAL9010 white	2	C75	4	600 x 1200	596 x 1030
K60LCX501	plain	RAL9010 white	2	C75	4	600 x 1200	596 x 1030
K60CX701	R2516 micropunched	RAL9006 silver	2	C75	4	600 x 1200	596 x 1030
K60LCX701	plain	RAL9006 silver	2	C75	4	600 x 1200	596 x 1030

K60A



K60A (micropunched)



K60LA (plain)

K60A is a steel sheet panel for laying on parallel structure at sight that permits making a modular false ceiling of 600x1200mm.

K60A panel is an active panel; it has 2 thermal diffusers in anodized aluminium of 220 mm width, glued on panels in the factory. The hydraulic circuit is made by means of a plastic material pipe size 16x1,5 mm with anti-oxygen barrier. The connection in series of the panels among them and to the delivery and return manifolds is made by straight or angle push fittings and plastic material pipe size 16x1,5 mm.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width (16% boring percentage).

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Two safety springs keep the panel on seat and permit the opening and the closing. The K6A panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,8 mm zinc coated steel sheet
- Stove enamelled
- For false ceilings module 600x1200 mm
- Type A activation
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- $K_p = 2,11$ (with capacity in l/h and loss of pressure in mm w.c.)
- 596x1030 mm panel dimensions

Nominal outputs

- Cooling (according to EN14240): 44,1 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 46,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.

For further information about K60A panel, consult also the Technical Sheet 0347EN

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K60AX501	R2516 micropunched	RAL9010 white	2	A220	2	600 x 1200	596 x 1030
K60LAX501	plain	RAL9010 white	2	A220	2	600 x 1200	596 x 1030
K60AX701	R2516 micropunched	RAL9006 silver	2	A220	2	600 x 1200	596 x 1030
K60LAX701	plain	RAL9006 silver	2	A220	2	600 x 1200	596 x 1030

K60T



K60T (micropunched)



K60LT (plain)

K60T is a steel sheet panel for laying on parallel structure at sight that permits making a modular false ceiling size 600x1200 mm.

K60T is an inactive panel; it has no thermal diffusers and has a preblanking for flush mounting of light appliances or air diffusers. Plain and micropunched versions are available; the last has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width.

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Two safety springs keep the panel on seat and permit the opening and the closing. The K60T panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

Main features

- 0,8 mm zinc coated steel sheet
- Stove enamelled
- For false ceilings module 600x1200 mm
- Inactive (without thermal diffusers)
- Square preblanking 576x576 mm for flush mounting of light appliances and air diffusers
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- 596x1030 mm panel dimensions

On demand and for minimum quantities, other preblanking types are available.

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	PREBLANKING [mm]	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K60TX511	R2516 micropunched	RAL9010 white	2	square 576 x 576	600 x 1200	596 x 1030
K60LTX511	plain	RAL9010 white	2	square 576 x 576	600 x 1200	596 x 1030
K60TX711	R2516 micropunched	RAL9006 silver	2	square 576 x 576	600 x 1200	596 x 1030
K60LTX711	plain	RAL9006 silver	2	square 576 x 576	600 x 1200	596 x 1030

Structure and accessories

K832



Brackets for parallel structure carrying elements in zinc coated steel. Assembly with bolts and self threading screws.

PRODUCT CODE	TYPE	DIMENSIONS [mm]
K832X001	for carrying elements base 150 mm	228 x 52 X 70
K832X002	for carrying elements base 100 mm	178 x 52 X 70

K831



Carrying element for parallel structure in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	FALSE CEILING MODULE [mm]	DIMENSIONS [mm]
K831X522	RAL9010 white	600 x 1200	150 x 1200
K831X532	RAL9010 white	600 x 1200	150 x 1800
K831X542	RAL9010 white	600 x 1200	150 x 2400
K831X524	RAL9010 white	600 x 1150	100 x 1200
K831X534	RAL9010 white	600 x 1150	100 x 1800
K831X544	RAL9010 white	600 x 1150	100 x 2400
K831X722	RAL9006 silver	600 x 1200	150 x 1200
K831X732	RAL9006 silver	600 x 1200	150 x 1800
K831X742	RAL9006 silver	600 x 1200	150 x 2400
K831X724	RAL9006 silver	600 x 1150	100 x 1200
K831X734	RAL9006 silver	600 x 1150	100 x 1800
K831X744	RAL9006 silver	600 x 1150	100 x 2400

KPOR



Header half-carrying element for parallel structure in 08/10 steel sheet, stove enamelled.

PRODUCT CODE	COLOUR	FALSE CEILING MODULE [mm]	DIMENSIONS [mm]
KPOR1X522	RAL9010 white	600 x 1200	50 x 1200
KPOR1X532	RAL9010 white	600 x 1200	50 x 1800
KPOR1X542	RAL9010 white	600 x 1200	50 x 2400
KPOR2X522	RAL9010 white	600 x 1200	75 x 1200
KPOR2X532	RAL9010 white	600 x 1200	75 x 1800
KPOR2X542	RAL9010 white	600 x 1200	75 x 2400
KPOR3X522	RAL9010 white	600 x 1200	100 x 1200
KPOR3X532	RAL9010 white	600 x 1200	100 x 1800
KPOR3X542	RAL9010 white	600 x 1200	100 x 2400

KSTA

Bracket for half-carrying element for parallel structure, base 50, 75 and 100 mm in 20/10 zinc coated steel.

Assembly with bolts and self threading screws.

PRODUCT CODE	TYPE	DIMENSIONS [mm]
KSTA1X001	for half-carrying elements base 50 mm	88 x 52 x 70
KSTA2X001	for half-carrying elements base 75 mm	113 x 52 x 70
KSTA3X001	for half-carrying elements base 100 mm	138 x 52 x 70

K841

Header for parallel structure in steel sheet 08/10 zinc coated and stove enamelled.

PRODUCT CODE	COLOUR	TYPE	DIMENSIONS [mm]
K841X521	RAL9010 white	for structures base 150 mm	150 x 1200
K841X531	RAL9010 white	for structures base 150 mm	150 x 1350
K841X541	RAL9010 white	for structures base 150 mm	150 x 2400
K841X523	RAL9010 white	for structures base 100 mm	100 x 1150
K841X533	RAL9010 white	for structures base 100 mm	100 x 1250
K841X543	RAL9010 white	for structures base 100 mm	100 x 2300
K841X721	RAL9006 silver	for structures base 150 mm	150 x 1200
K841X731	RAL9006 silver	for structures base 150 mm	150 x 1350
K841X741	RAL9006 silver	for structures base 150 mm	150 x 2400
K841X723	RAL9006 silver	for structures base 100 mm	100 x 1150
K841X733	RAL9006 silver	for structures base 100 mm	100 x 1250
K841X743	RAL9006 silver	for structures base 100 mm	100 x 2300

K842

Bracket for header of the parallel structure, in zinc coated 20/10 steel.

Assembly with bolts and self threading screws.

PRODUCT CODE	TYPE	DIMENSIONS [mm]
K842X001	for carrying elements base 150 mm	110 x 52 x 70
K842X002	for carrying elements base 100 mm	60 x 52 x 70

K833

Space cross piece for parallel structure in zinc coated 10/10 steel sheet.

Assembly with bolts.

PRODUCT CODE	TYPE	DIMENSIONS [mm]
K833X001	for carrying elements base 150 mm	30 x 1050

K800L



"L" shape perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800LX501	RAL9010 white	3000	18 x 28
K800LX701	RAL9006 silver	3000	18 x 28

K800C



"C" shape perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800CX501	RAL9010 white	3000	18 x 32 x 18
K800CX701	RAL9006 silver	3000	18 x 32 x 18

K800S



"S" shape perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800SX501	RAL9010 white	3000	18 x 12 x 18
K800SX701	RAL9006 silver	3000	18 x 12 x 18

K835



Stave for lateral compensation in 06/10 zinc coated and stove enamelled steel sheet.

(* Available on demand and for minimum quantities.

PRODUCT CODE	COLOUR	DIMENSIONS [mm]
K835X511	RAL9010 white	300 x 200
K835X521	RAL9010 white	300 x 300
K835X531	RAL9010 white	300 x 400
K835X541	RAL9010 white	300 x 500
K835X551	RAL9010 white	300 x 600
K835X561	RAL9010 white	300 x 700
K835X571	RAL9010 white	300 x 800

K818


Perforated bar in zinc coated steel sheet for structure assembly.

PRODUCT CODE	LENGTH [mm]	DIMENSIONS [mm]
K818X001	4000	25 x 10

K819

Bracket for perforated bar, zinc coated steel sheet.
Assembly with bolts.

PRODUCT CODE	DIMENSIONS [mm]
K819X001	50 x 95

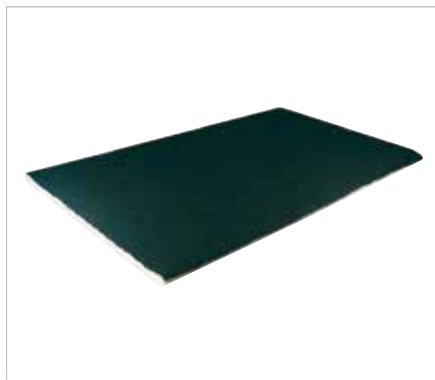K820


Thermo-acoustic panel to be used with K60, K60C and K60A panels.
Made of polyester fibre with coupled membrane of nonwoven fabric.

Main features

- Density 20 kg/m³
- Thickness 25 mm
- Black colour

On demand, and for minimum quantities, other insulation panel types are available.

PRODUCT CODE	DIMENSIONS [mm]
K820X002	610 x 960 x 25

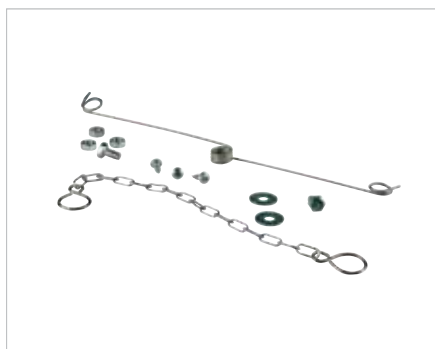PGK

Assembly accessories.

PRODUCT CODE	TYPE	PACKAGE
PGK01X001	2 springs + 2 washers + 2 screws	1 pc.
PGK06X001	suspension chain with hooks	1 pc.
PGK08X001	M6 x 10 screw	250 pcs.
PGK09X001	M6 nut	250 pcs.
PGK10X001	washer for M6 screw	250 pcs.
PGK11X001	4,2x9,5 self-threading screw, cross cut	250 pcs.
PGK12X001	4,2x13 self-tapping screw, cross cut	500 pcs.

Connection components

K85RC



Connection kit constituted by a flexible pipe in EPDM with anti-oxygen barrier, having a sleeve in stainless steel mesh, and two fittings.

PRODUCT CODE	CONNECTION TYPE	FITTINGS	LENGTH [mm]
K85RCY001	Panel-panel	2 push fittings size 12 mm	750
K85RCY002	Panel-manifold	1 push fitting size 12 mm and 1 threaded G 1/2"F	400

RC102



Straight push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC102X004	12
RC102X007	16

RC107



Straight push fitting, male threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC107X014	1/2" M	12
RC107X017	1/2" M	16

RC109



Straight push fitting, female threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC109X014	1/2" F	12
RC109X017	1/2" F	16

RC122

Angle push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC122X004	12
RC122X007	16

RC900

Support sleeve for connections made by means of push fittings and plastic material pipe.

PRODUCT CODE	PIPE [mm]
RC900Y011	12 x 1,5
RC900Y016	16 x 1,5


R986

Polybutylene pipe with anti-oxygen barrier for the panel connection in series between active panels in combination with RC102, RC107 and RC122 push fittings. The pipe section end shall be necessarily completed by the RC900 support sleeve before introduction into the RC push fitting.

On demand, and for minimum quantities, cut pieces of R986 pipe are available and equipped with RC900 support sleeve.

PRODUCT CODE	TYPE	DIMENSIONS [mm]	COIL [m]
R986IY113	Insulated	16 x 1,5	50
R986SY100	Not insulated	12 x 1,5	100
R986SY120	Not insulated	16 x 1,5	100

K120

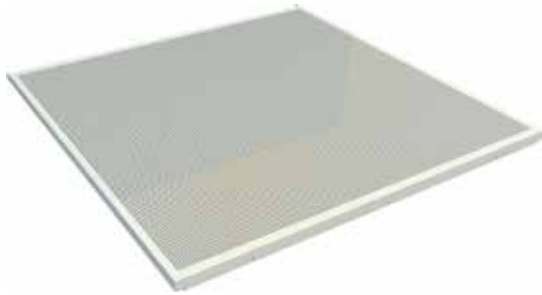

K120 (micropunched)



K120L (plain)

K120 is a panel made of zinc coated steel sheet, stove enamelled, for laying on crossed structure at sight that permits making a modular false ceiling of 1200x1200 mm.

K120 is an inactive panel; it has no thermal diffusers and it serves for completion of the active surface made with K120C or K120A panels.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width (16% boring percentage).

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Three safety springs keep the panel on seat and permit the opening and the closing. The K120 panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.


The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features


- 0,8 mm zinc coated steel sheet
- For false ceilings module 1200x1200 mm
- Inactive (without thermal diffusers)
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- 1030x1030 mm panel dimensions

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K120X501	R2516 micropunched	RAL9010 white	3	1200 x 1200	1030 x 1030
K120LX501	plain	RAL9010 white	3	1200 x 1200	1030 x 1030
K120X701	R2516 micropunched	RAL9006 silver	3	1200 x 1200	1030 x 1030
K120LX701	plain	RAL9006 silver	3	1200 x 1200	1030 x 1030

K120C

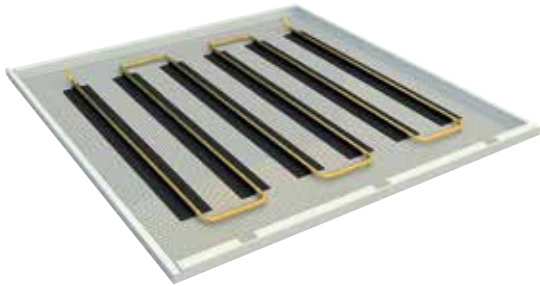

K120C (micropunched)

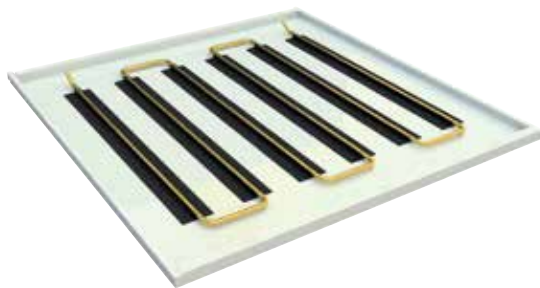

K120LC (plain)

K120C is a zinc coated steel sheet panel, stove enamelled, for laying on crossed structure at sight that permits making a modular false ceiling of 1200x1200mm.

K120C is an active panel; it has 6 thermal diffusers in anodized aluminium of 75 mm width, glued on panels in the factory. The hydraulic circuit is made through copper serpentine with 12x1 mm pipe.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width (16% boring percentage).

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Three safety springs keep the panel on seat and permit the opening and the closing. The K120C panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,8 mm steel sheet
- For false ceilings module 1200x1200 mm
- Type C activation
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- $K_p = 0,73$ (with capacity in l/h and loss of pressure in mm w.c.)
- 1030x1030 mm panel dimensions

Nominal outputs


- Cooling (according to EN14240): 96,9 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 87,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.


For further information about K120C panel, consult also the Technical Sheet 0350EN

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K120CX501	R2516 micropunched	RAL9010 white	3	C75	6	1200 x 1200	1030 x 1030
K120CX502	plain	RAL9010 white	3	C75	6	1200 x 1200	1030 x 1030
K120CX701	R2516 micropunched	RAL9006 silver	3	C75	6	1200 x 1200	1030 x 1030
K120CX702	plain	RAL9006 silver	3	C75	6	1200 x 1200	1030 x 1030

K120A

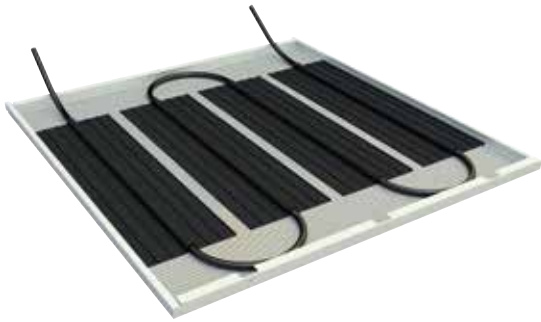

K120A (micropunched)

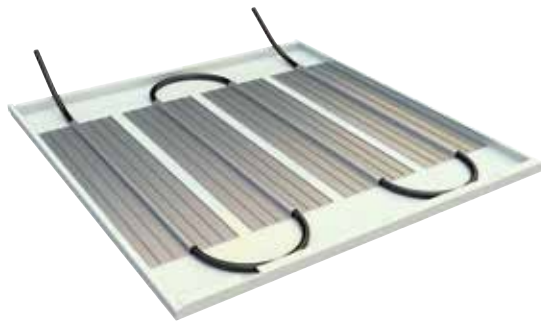

K120LA (plain)

K120A is a zinc coated steel sheet panel, stove enamelled, for laying on parallel structure at sight that permits making a modular false ceiling of 1200x1200mm.

K120A panel is an active panel; it has 4 thermal diffusers in anodized aluminium of 220 mm width, glued on panels in the factory. The hydraulic circuit is made by means of a plastic material pipe size 16x1,5 mm with anti-oxygen barrier. The connection in series of the panels among them and to the delivery and return manifolds is made by straight or angle push fittings and plastic material pipe size 16x1,5 mm.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width (16% boring percentage).

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Three safety springs keep the panel on seat and permit the opening and the closing. The K120A panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,8 mm steel sheet
- For false ceilings module 1200x1200 mm
- Type A activation
- Laying on parallel structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- $K_p = 1,52$ (with capacity in l/h and loss of pressure in mm w.c.)
- 1030x1030 mm panel dimensions

Nominal outputs


- Cooling (according to EN14240): 44,1 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 46,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.

For further information about K120A panel, consult also the Technical Sheet 0349EN

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K120AX501	R2516 micropunched	RAL9010 white	3	A220	4	1200 x 1200	1030 x 1030
K120AX502	plain	RAL9010 white	3	A220	4	1200 x 1200	1030 x 1030
K120AX701	R2516 micropunched	RAL9006 silver	3	A220	4	1200 x 1200	1030 x 1030
K120AX702	plain	RAL9006 silver	3	A220	4	1200 x 1200	1030 x 1030

K120T

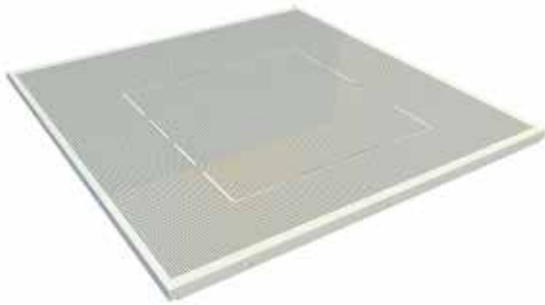

K120T (micropunched)

K120T is a zinc coated steel sheet panel, stove enamelled, for laying on crossed structure at sight that permits making a modular false ceiling size 1200x1200 mm.

K120T is an inactive panel; it has no thermal diffusers and has a preblanking for flush mounting of light appliances or air diffusers.

The panel has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 20 mm width.

Each panel has two hooks fixed in the appropriate buttonholes of the carrying elements, around which the panel can rotate. Three safety springs keep the panel on seat and permit the opening and the closing. The K120T panel can be therefore hooked off, rotated of 90° and positioned vertically to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

Main features

- 0,8 mm zinc coated steel sheet
- For false ceilings module 1200x1200 mm
- Inactive (without thermal diffusers)
- Preblanking for flush mounting of light appliances and air diffusers
- Laying on crossed structure at sight
- Suspension by means of hooks fixed in the buttonholes of the carrying elements
- Class 0 of fire reaction
- 1030x1030 mm panel dimensions

PRODUCT CODE	PANEL FINISHING	COLOUR	SAFETY SPRINGS	PREBLANKING [mm]	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K120TX521	R2516 micropunched	RAL9010 white	3	square 576 x 576	1200 x 1200	1030 x 1030
K120TX721	R2516 micropunched	RAL9006 silver	3	square 576 x 576	1200 x 1200	1030 x 1030

Structure and accessories

K851

Primary carrying element for crossed structure in 08/10 steel sheet, zinc coated and stove enamelled.

PRODUCT CODE	COLOUR	TYPE [mm]	DIMENSIONS [mm]
K851X501	RAL9010 white	1200 x 1200	150 x 1200
K851X701	RAL9006 silver	1200 x 1200	150 x 1200

K861

Header primary carrying element for crossed structure in 08/10 steel sheet, zinc coated and stove enamelled.

PRODUCT CODE	COLOUR	TYPE [mm]	DIMENSIONS [mm]
K861X501	RAL9010 white	1200 x 1200	150 x 1350
K861X701	RAL9006 silver	1200 x 1200	150 x 1350

K871

Secondary carrying element for crossed structure in 08/10 steel sheet, zinc coated and stove enamelled.

PRODUCT CODE	COLOUR	TYPE [mm]	DIMENSIONS [mm]
K871X501	RAL9010 white	1200 x 1200	150 x 1050
K871X701	RAL9006 silver	1200 x 1200	150 x 1050

K852

Bracket for primary carrying elements in 20/10 steel, zinc coated. Assembly with bolts and self-threading screws.

PRODUCT CODE	COLOUR	TYPE [mm]	DIMENSIONS [mm]
K852X001	RAL9010 white	120 x 120	150 x 52 x 70

K871T



Secondary carrying element for crossed structure in 08/10 steel sheet, zinc coated and stove enamelled with preblanking for light appliances.

PRODUCT CODE	COLOUR	PREBLANKING [mm]	DIMENSIONS [mm]
K871TX501	RAL9010 white	rectangular 110 x 880	150 x 1050
K871TX711	RAL9006 silver	rectangular 110 x 880	150 x 1050

K891



Special primary carrying element for assembly of GK60 series panels in crossed structure GK120 type in 8/10 steel sheet, zinc coated and stove enamelled.

PRODUCT CODE	COLOUR	TYPE	DIMENSIONS [mm]
K891X501	RAL9010 white	GK60 in GK120 crossed structure	150 x 616
K891X701	RAL9006 silver	GK60 in GK120 crossed structure	150 x 616

K832



Bracket for assembly of the K891 carrying element. 20/10 zinc coated steel, assembly with bolts and self-threading screws.

PRODUCT CODE	TYPE	DIMENSIONS [mm]
K832X001	for carrying elements base150 mm	228 x 52 x 70

K820



Thermo acoustic panel to be used with K120, K120C and K120A panels. Made of polyester fibre with coupled membrane of nonwoven fabric.

Main features

- Density 20 kg/m³
- Thickness 25 mm
- Black colour

On demand, and for minimum quantities, other insulation panel types are available.

PRODUCT CODE	DIMENSIONS [mm]
K820X003	1040 x 960 x 25

K800L



"L" shape perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800LX501	RAL9010 white	3000	18 x 28
K800LX701	RAL9006 silver	3000	18 x 28

K800C



"C" shape perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800CX501	RAL9010 white	3000	18 x 32 x 18
K800CX701	RAL9006 silver	3000	18 x 32 x 18

K800S



"S" shape perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800SX501	RAL9010 white	3000	18 x 12 x 18
K800SX701	RAL9006 silver	3000	18 x 12 x 18

K835



Stave for lateral compensation in 06/10 zinc coated and stove enamelled steel sheet.

Available on demand and for minimum quantities.

PRODUCT CODE	COLOUR	DIMENSIONS [mm]
K835X511	RAL9010 white	300 x 200
K835X521	RAL9010 white	300 x 300
K835X531	RAL9010 white	300 x 400
K835X541	RAL9010 white	300 x 500
K835X551	RAL9010 white	300 x 600
K835X561	RAL9010 white	300 x 700
K835X571	RAL9010 white	300 x 800

K818

Perforated bar in zinc coated steel sheet for structure assembly.

PRODUCT CODE	LENGTH [mm]	DIMENSIONS [mm]
K818X001	4000	25 x 10

K819

Bracket for perforated bar, zinc coated steel sheet.
Assembly with bolts.

PRODUCT CODE	DIMENSIONS [mm]
K819X001	50 x 95

K820


Thermo-acoustic panel to be used with K120, K120C and K120A panels.
Made of polyester fibre with coupled membrane of nonwoven fabric.

Main features

- Density 20 kg/m³
- Thickness 25 mm
- Black colour

On demand, and for minimum quantities, other insulation panel types are available.

PRODUCT CODE	DIMENSIONS [mm]
K820X003	1040 x 960 x 25

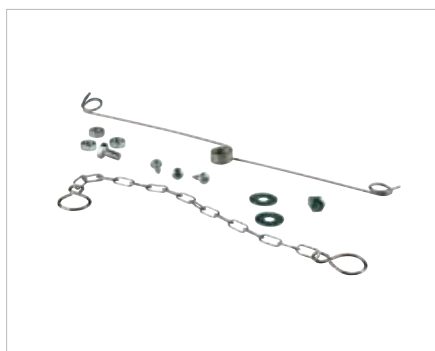PGK

Assembly accessories.

PRODUCT CODE	TYPE	PACKAGE
PGK01X001	2 springs + 2 washers + 2 screws	1 pc.
PGK06X001	suspension chain with hooks	1 pc.
PGK08X001	M6 x 10 screw	250 pcs.
PGK09X001	M6 nut	250 pcs.
PGK10X001	washer for M6 screw	250 pcs.
PGK11X001	4,2x9,5 self-threading screw, cross cut	250 pcs.
PGK12X001	4,2x13 self-tapping screw, cross cut	500 pcs.

Connection components

K85RC



Connection kit constituted by a flexible pipe in EPDM with anti-oxygen barrier, having a sleeve in stainless steel mesh, and two fittings.

PRODUCT CODE	CONNECTION TYPE	FITTINGS	LENGTH [mm]
K85RCY001	Panel-panel	2 push fittings size 12 mm	750
K85RCY002	Panel-manifold	1 push fitting size 12 mm and 1 threaded G 1/2" F	400

RC102



Straight push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC102X004	12
RC102X007	16

RC107



Straight push fitting, male threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC107X014	1/2" M	12
RC107X017	1/2" M	16

RC109



Straight push fitting, female threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC109X014	1/2" F	12
RC109X017	1/2" F	16

RC122

Angle push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC122X004	12
RC122X007	16

RC900

Support sleeve for connections made by means of push fittings and plastic material pipe.


PRODUCT CODE	PIPE [mm]
RC900Y011	12 x 1,5
RC900Y016	16 x 1,5

R986

Polybutylene pipe with anti-oxygen barrier for the panel connection in series between active panels in combination with RC102, RC107 and RC122 push fittings. The pipe section end shall be necessarily completed by the RC900 support sleeve before introduction into the RC push fitting.

On demand, and for minimum quantities, cut pieces of R986 pipe are available and equipped with RC900 support sleeve.

PRODUCT CODE	TYPE	DIMENSIONS [mm]	COIL [m]
R986IY113	Insulated	16 x 1,5	50
R986SY100	not insulated	12 x 1,5	100
R986SY120	not insulated	16 x 1,5	100

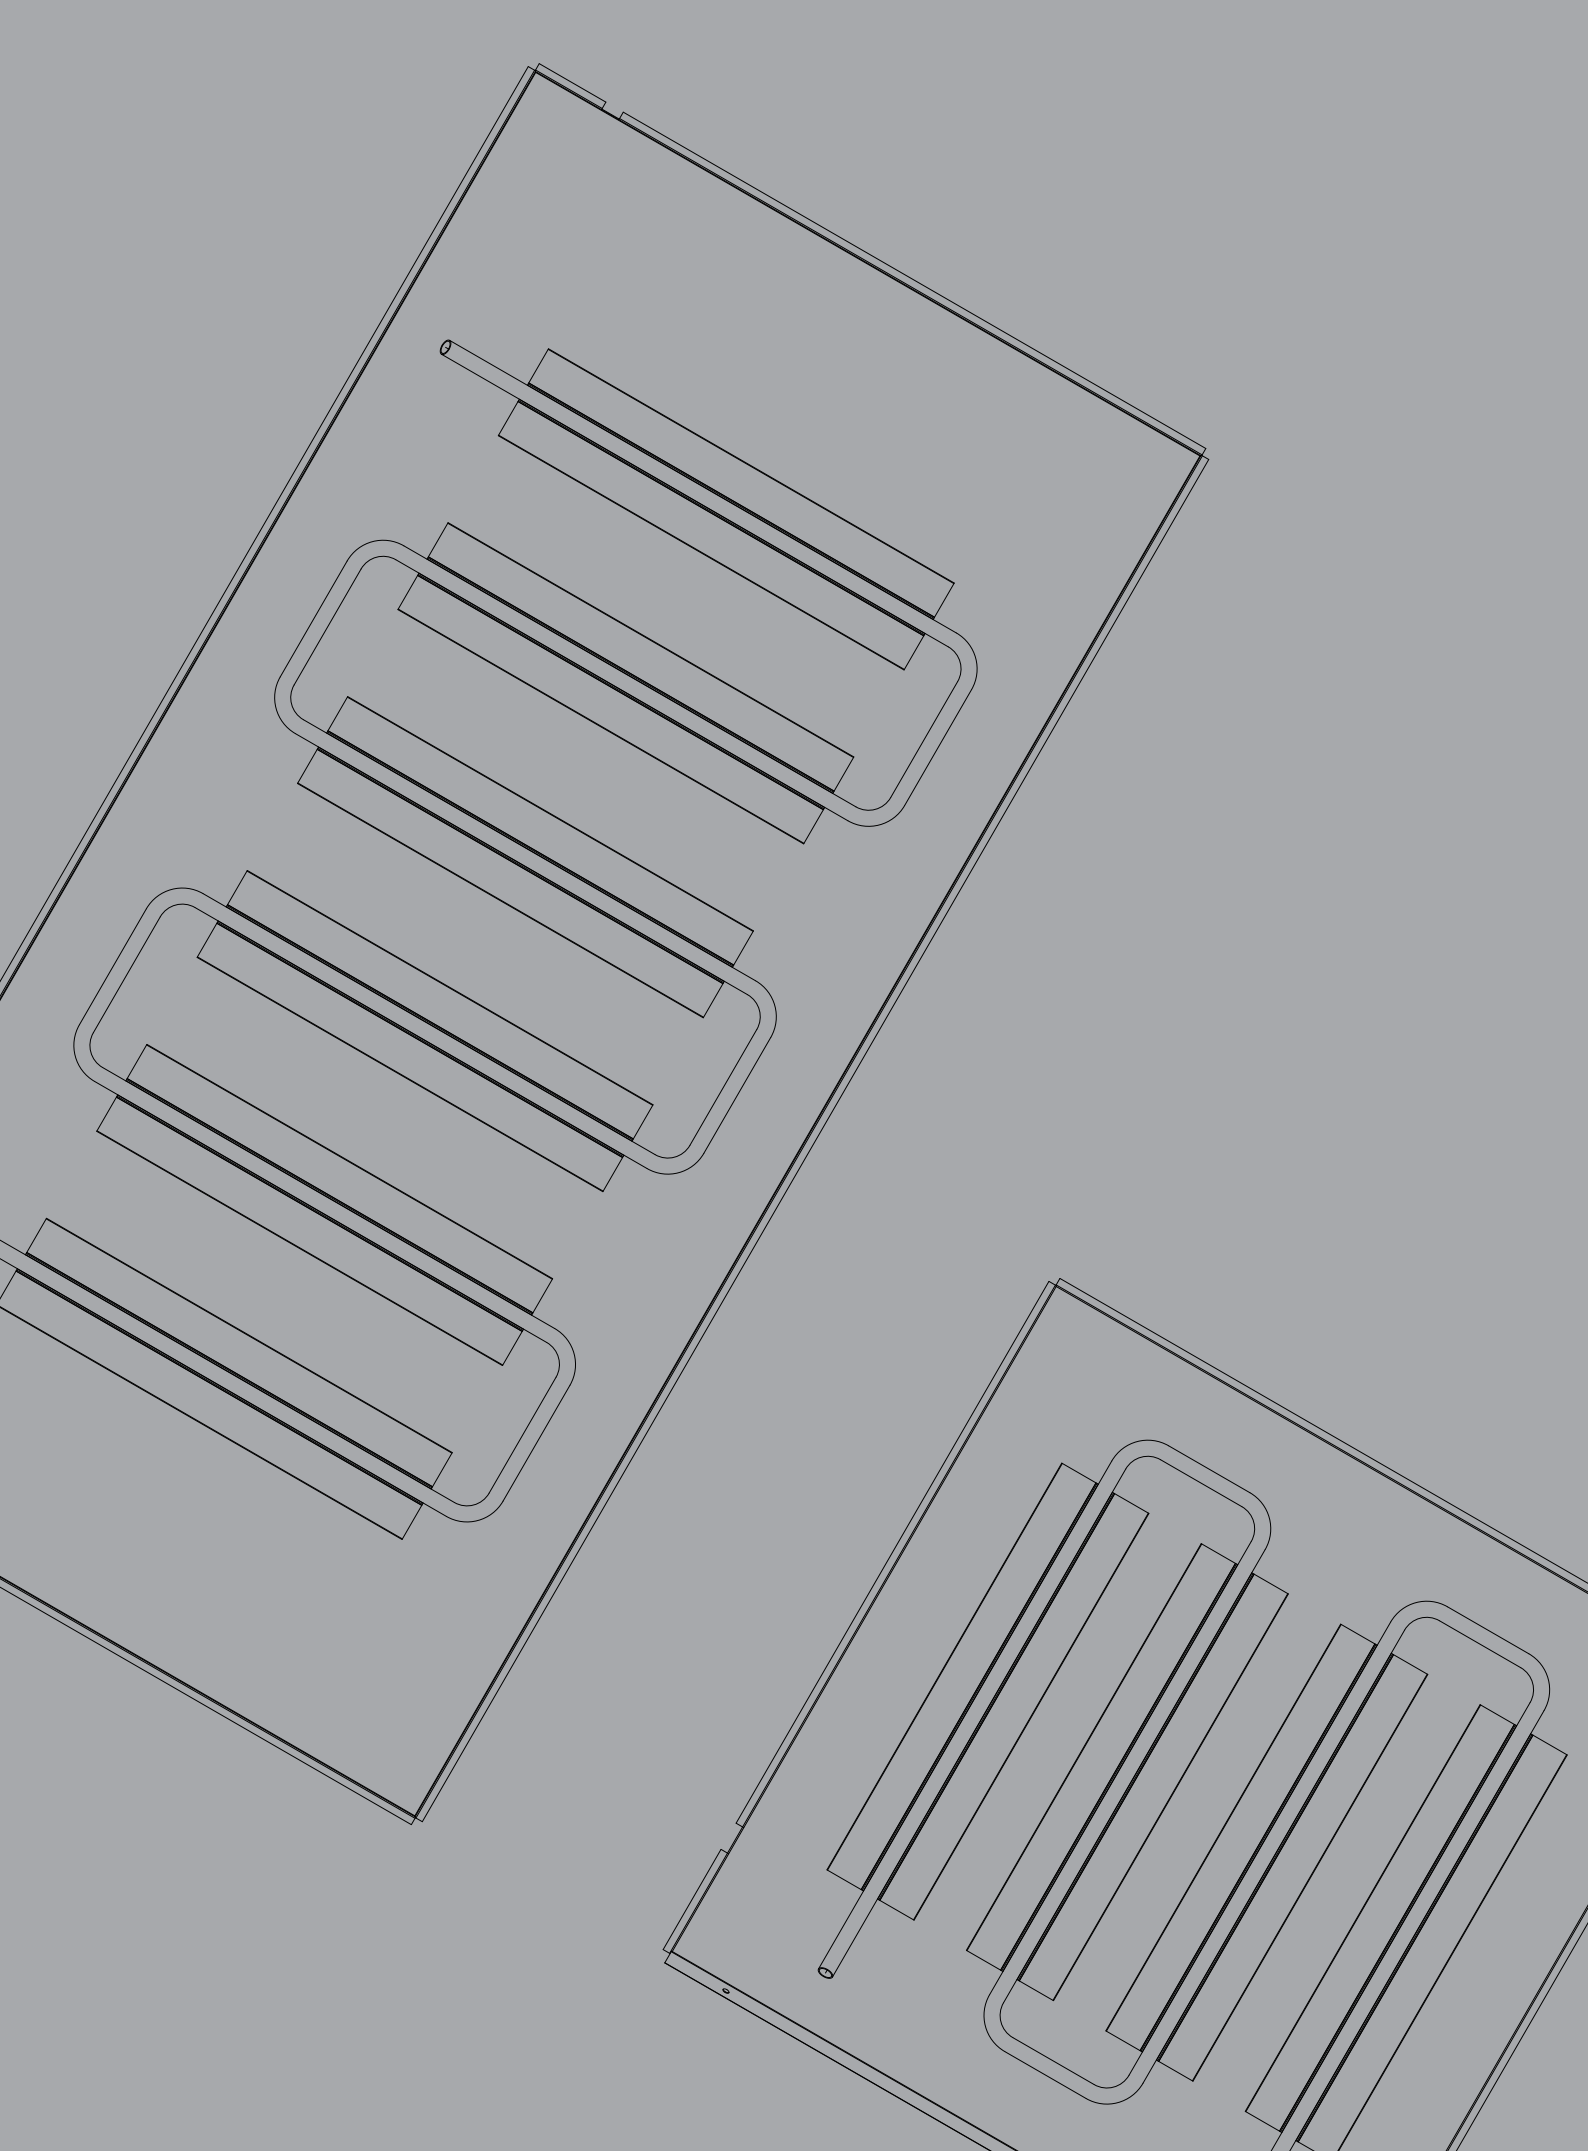

GK PSV SERIES RADIANT CEILING

GK60x60 PSV and GK60X120 PSV SERIES

giacoklima® GK PSV is a radiant modular false ceiling system particularly suitable for the heating and cooling of offices, hospitals, airports, commercial rooms, schools and service sector buildings in general. From the construction point of view, the system is composed by active and inactive steel sheet panels, T shaped steel sheet carrying elements, base 24 mm, and a suspension system by means of rigid hangers and millimetric regulation springs that permit obtaining a perfect flatness and horizontality of the false ceiling. Two activation types (C and A) of your choice permit satisfying different thermal output requirements. The standard module 600x600 mm, feature of the GKPSV system, offers the advantage of easily integrating the components of other systems that shall be turned in room – as for example lights or air diffusers – without cutting the panels, making boring or breaking. In alternative, the module 600x1200 mm is available too.

Easy and rapid to be installed, GK PSV radiant false ceiling can be opened any time to have free access to the systems placed in the plenum and make maintenance operations. The availability of the micropunched panels is particularly useful to exploit the plenum for the delivery of the renewal dehumidified air or to make the room acoustics better thanks to the high sound-absorbing power. A proper thermo acoustic panel made of polyester fibre, can be placed on the upper part of the panels when a thermal insulation is needed upwards or to increase the acoustic performance.

() On demand, and for minimum quantities, also the GK PSN version is available for assembly on hidden structure.*

GK60x60 PSV SERIES

Page 32



GK60x120 PSV SERIES

Page 38



K6



K6 (micropunched)



K6L (plain)


K6 is a prepainted steel sheet panel for laying on T shaped structure, base 24 mm, that permits making a modular false ceiling. K6 is an inactive panel; it has no thermal diffusers and serves to complete the active surface made with K6C or K6A panels. Plain and micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 15 mm width (16% boring percentage). The panel is prearranged for the introduction of two PGK suspension cables that are fixed to the T carrying structure during the assembly. The K6 panel can be therefore hooked off and positioned vertically, by remaining hanged to the two cables, to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,6 mm zinc coated steel sheet
- For false ceilings module 600x600 mm
- Inactive (without thermal diffusers)
- Laying on T shaped structure, base 24 mm
- Suspension by means of cables
- Class 0 of fire reaction
- 575x575 mm panel dimensions

PRODUCT CODE	PANEL FINISHING	COLOUR	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K6X300	R2516 micropunched	RAL9003 white	600 x 600	575 x 575
K6LX300	plain	RAL9003 white	600 x 600	575 x 575
K6X200	R2516 micropunched	RAL9006 silver	600 x 600	575 x 575
K6LX200	plain	RAL9006 silver	600 x 600	575 x 575



K6C (micropunched)



K6LC (plain)

K6C is a steel sheet panel for laying on T shaped structure, base 24 mm that permits making a modular false ceiling.

K6C panel is an active panel; it has 4 thermal diffusers in anodized aluminium of 75 mm width, glued on panels in the factory. The hydraulic circuit is made through copper serpentine with 12x1 mm pipe.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 15 mm width (16% boring percentage).

The panel is prearranged for the introduction of two PGK suspension cables that are fixed to the T carrying structure during the assembly. The K6C panel can be therefore hooked off and positioned vertically, by remaining hanged to the two cables, to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,6 mm zinc coated steel sheet
- For false ceilings module 600x600 mm
- Type C activation
- Laying on T shaped structure base 24 mm
- Suspension by means of cables
- Class 0 of fire reaction
- $K_v = 0,96$ (with capacity in l/h and loss of pressure in mm w.c.)
- 575x575 mm panel dimensions

Nominal outputs

- Cooling (according to EN14240): 96,9 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 87,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.


For further information about K6C panel, consult also the Technical Sheet 0344EN

PRODUCT CODE	PANEL FINISHING	COLOUR	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K6CX300	R2516 micropunched	RAL9003 white	C75	4	600 x 600	575 x 575
K6LCX300	plain	RAL9003 white	C75	4	600 x 600	575 x 575
K6CX200	R2516 micropunched	RAL9006 silver	C75	4	600 x 600	575 x 575
K6LCX200	plain	RAL9006 silver	C75	4	600 x 600	575 x 575

K6A



K6A (micropunched)



K6LA (plain)

K6A is a prepainted steel sheet panel for laying on T shaped structure, base 24 mm that permits making a modular false ceiling.

K6A panel is an active panel; it has 2 thermal diffusers in anodized aluminium of 220 mm width, glued on panels in the factory. The hydraulic circuit is made by means of a plastic material pipe size 16x1,5 mm with anti-oxygen barrier. The connection in series of the panels among them and to the delivery and return manifolds is made by straight or angle push fittings and plastic material pipe size 16x1,5 mm.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 15 mm width (16% boring percentage).

The panel is prearranged for the introduction of two PGK suspension cables that are fixed to the T carrying structure during the assembly. The K6A panel can be therefore hooked off and positioned vertically, by remaining hanged to the two cables, to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,6 mm zinc coated steel sheet
- For false ceilings module 600x600 mm
- Type A activation
- Laying on T shaped structure base 24 mm
- Suspension by means of cables
- Class 0 of fire reaction
- $K_v = 2,30$ (with capacity in l/h and loss of pressure in mm w.c.)
- 575x575 mm panel dimensions

Nominal outputs

- Cooling (according to EN14240): 44,1 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 46,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.

For further information about K6A panel, please consult also the Technical Sheet 0343EN

PRODUCT CODE	PANEL FINISHING	COLOUR	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K6AX300	R2516 micropunched	RAL9003 white	A220	2	600 x 600	575 x 575
K6LAX300	plain	RAL9003 white	A220	2	600 x 600	575 x 575
K6AX200	R2516 micropunched	RAL9006 silver	A220	2	600 x 600	575 x 575
K6LAX200	plain	RAL9006 silver	A220	2	600 x 600	575 x 575

Structure and accessories

KSV



T shaped structure base 24 mm made of prepainted steel sheet.

PRODUCT CODE	COLOUR	FALSE CEILING MODULE [mm]	DIMENSIONS [mm]
KSV6X300	RAL9003 white	600 x 600	600
KSV12X300	RAL9003 white	600 x 600	1200
KSV36X300	RAL9003 white	600 x 600	3600
KSV6X200	RAL9006 silver	600 x 600	600
KSV12X200	RAL9006 silver	600 x 600	1200
KSV36X200	RAL9006 silver	600 x 600	3600


K800L



"L" shaped perimeter profile in 08/10 zinc coated and stove enamelled steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800LX301	RAL9003 white	3000	18 x 28
K800LX201	RAL9006 silver	3000	18 x 28

PGK

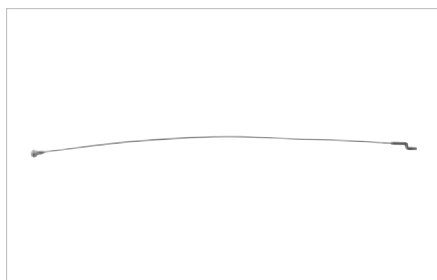

Suspension metallic cable for GK PSV panels.

PRODUCT CODE	LENGTH [mm]
PGK06X002	312

K820



Thermo-acoustic panel to be used with K6, K6C and K6A panels.
Made of polyester fibre with coupled membrane of nonwoven fabric.

Main features

- Density 20 kg/m³
- Thickness 25 mm
- Black colour

On demand, and for minimum quantities, other insulation panel types are available.

PRODUCT CODE	DIMENSIONS [mm]
K820X004	580 x 580 x 25

Connection components

R986



Polybutylene pipe with anti-oxygen barrier for the panel connection in series between active panels in combination with RC102, RC107 and RC122 push fittings. The pipe section end shall be necessarily completed by the RC900 support sleeve before introduction into the RC push fitting.

On demand, and for minimum quantities, cut pieces of R986 pipe are available and equipped with RC900 support sleeve.

PRODUCT CODE	TYPE	DIMENSIONS [mm]	COIL [m]
R986IY113	Insulated	16 x 1,5	50
R986SY100	not insulated	12 x 1,5	100
R986SY120	not insulated	16 x 1,5	100

RC102



Straight push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC102X004	12
RC102X007	16

RC107



Straight push fitting, male threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC107X014	1/2" M	12
RC107X017	1/2" M	16

RC109

Straight push fitting, female threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC109X014	1/2" F	12
RC109X017	1/2" F	16

RC122

Angle push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC122X004	12
RC122X007	16

RC900

Support sleeve for connections made by means of push fittings and plastic material pipe.


PRODUCT CODE	PIPE [mm]
RC900Y011	12 x 1,5
RC900Y016	16 x 1,5

K85RC

Connection kit constituted by a flexible pipe in EPDM with anti-oxygen barrier, having a sleeve in stainless steel mesh, and two fittings.

PRODUCT CODE	CONNECTION TYPE	FITTINGS	LENGTH [mm]
K85RCY001	Panel-panel	2 push fittings size 12 mm	750
K85RCY002	Panel-manifold	1 push fitting size 12 mm and 1 threaded G 1/2" F	400

K12

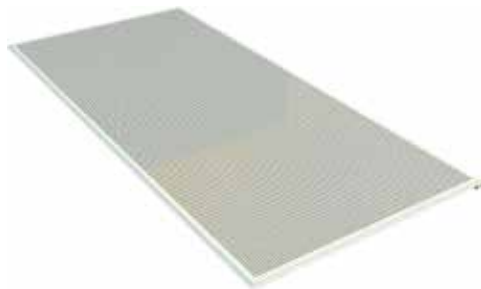

K12 (micropunched)



K12L (plain)

K12 is a prepainted steel sheet panel for laying on T shaped structure, base 24 mm that permits making a modular false ceiling. K12 panel is an inactive panel; it has no thermal diffusers and serves to complete the active surface made with K12C or K12A panels. Plain and micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 15 mm width (16% boring percentage). The panel is prearranged for the introduction of two PGK suspension cables that are fixed to the T carrying structure during the assembly. The K12 panel can be therefore hooked off and positioned vertically, by remaining hanged to the two cables, to open the false ceiling and reach the plenum to inspect or make maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features


- 0,6 mm zinc coated steel sheet
- For false ceilings module 600x1200 mm
- Inactive (without thermal diffusers)
- Laying on T shaped structure, base 24 mm
- Suspension by means of PGK cables
- Class 0 of fire reaction
- 575x1175 mm panel dimensions

PRODUCT CODE	PANEL FINISHING	COLOUR	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K12X300	R2516 micropunched	RAL9003 white	600 x 1200	575 x 1175
K12LX300	plain	RAL9003 white	600 x 1200	575 x 1175
K12X200	R2516 micropunched	RAL9006 silver	600 x 1200	575 x 1175
K12LX200	plain	RAL9006 silver	600 x 1200	575 x 1175

K12C



K12C (micropunched)

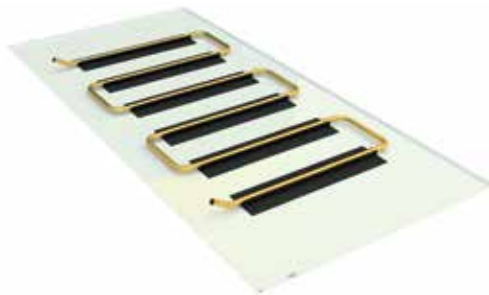

K12LC (plain)

K12C is a prepainted steel sheet panel for laying on T shaped structure, base 24 mm that permits making a modular false ceiling.

K12C panel is an active panel; it has 6 thermal diffusers in anodized aluminium of 75 mm width, glued on panels in the factory. The hydraulic circuit is made through copper serpentine with 12x1 mm pipe.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 15 mm width (16% boring percentage).

The panel is prearranged for the introduction of two PGK suspension cables that are fixed to the T carrying structure during the assembly.

The K12C panel can be therefore hooked off and positioned vertically, by remaining hanged to the two cables, to open the false ceiling and reach the plenum for inspection or maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,6 mm zinc coated steel sheet
- For false ceilings module 600x1200 mm
- Type C activation
- Laying on T shaped structure base 24 mm
- Suspension by means of PGK cables
- Class 0 of fire reaction
- $K_v = 0,81$ (with capacity in l/h and loss of pressure in mm w.c.)
- 575x1175 mm panel dimensions

Nominal outputs


- Cooling (according to EN14240): 96,9 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 87,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.


For further information about K12C panel, please consult also the Technical Sheet 0346EN

PRODUCT CODE	PANEL FINISHING	COLOUR	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K12CX300	R2516 micropunched	RAL9003 white	C75	6	600 x 1200	575 x 1175
K12LCX300	plain	RAL9003 white	C75	6	600 x 1200	575 x 1175
K12CX200	R2516 micropunched	RAL9006 silver	C75	6	600 x 1200	575 x 1175
K12LCX200	plain	RAL9006 silver	C75	6	600 x 1200	575 x 1175

K12A

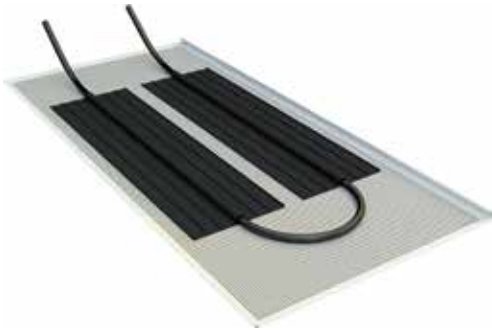

K12A (micropunched)

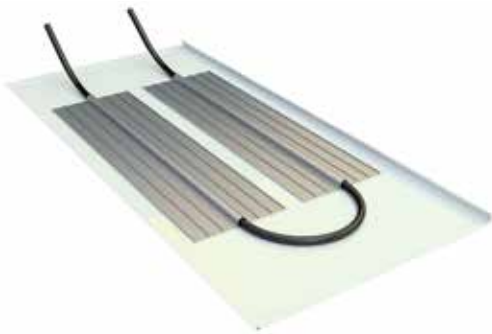

K12LA (plain)

K12A is a pre-painted steel sheet panel for laying on T shaped structure, base 24 mm that permits making a modular false ceiling.

K12A panel is an active panel; it has 2 thermal diffusers in anodized aluminium of 220 mm width, glued on panels in the factory. The hydraulic circuit is made by means of a plastic material pipe size 16x1,5 mm with anti-oxygen barrier. The connection in series of the panels among them and to the delivery and return manifolds is made by straight or angle push fittings and plastic material pipe size 16x1,5 mm.

The plain and the micropunched versions are available; this last one has a boring having 2,5 mm diameter holes on all surface except for a perimeter area of 15 mm width (16% boring percentage).

The panel is prearranged for the introduction of two PGK suspension cables that are fixed to the T carrying structure during the assembly. The K12A panel can be therefore hooked off and positioned vertically, by remaining hanged to the two cables, to open the false ceiling and reach the plenum for inspection or maintenance of the other plants, even with system running.

The need of thermal insulation can be satisfied with the use of the K820 thermo acoustic panel in polyester fibre.

Main features

- 0,6 mm zinc coated steel sheet
- For false ceilings module 600x1200 mm
- Type A activation
- Laying on T shaped structure base 24 mm
- Suspension by means of cables
- Class 0 of fire reaction
- $K_v = 2,11$ (with capacity in l/h and loss of pressure in mm w.c.)
- 575x1175 mm panel dimensions

Nominal outputs

- Cooling (according to EN14240): 44,1 W/m² with ΔT water-room of 8 K.
- Heating (according to EN14037): 46,3 W/m² with ΔT water-room of 10 K.

The indicated outputs refer to the active area of the panel as prescribed by the relative EN standards: for further information, consult also the Technical Manual 0138EN.

For further information about K12A panel, please consult also the Technical Sheet 0345EN

PRODUCT CODE	PANEL FINISHING	COLOUR	ACTIVATION TYPE	DIFFUSER NUMBER	FALSE CEILING MODULE [mm]	PANEL DIMENSIONS [mm]
K12AX300	R2516 micropunched	RAL9003 white	A220	2	600 x 1200	575 x 1175
K12LAX300	plain	RAL9003 white	A220	2	600 x 1200	575 x 1175
K12AX200	R2516 micropunched	RAL9006 silver	A220	2	600 x 1200	575 x 1175
K12LAX200	plain	RAL9006 silver	A220	2	600 x 1200	575 x 1175

Structure and accessories

KSV


T shaped structure base 24 mm made of prepainted steel sheet.

PRODUCT CODE	COLOUR	FALSE CEILING MODULE [mm]	DIMENSIONS [mm]
KSV6X300	RAL9003 white	600 x 600	600
KSV12X300	RAL9003 white	600 x 600	1200
KSV36X300	RAL9003 white	600 x 600	3600
KSV6X200	RAL9006 silver	600 x 600	600
KSV12X200	RAL9006 silver	600 x 600	1200
KSV36X200	RAL9006 silver	600 x 600	3600

K800L


"L" shaped perimeter profile in 08/10 zinc coated and prepainted steel sheet.

PRODUCT CODE	COLOUR	LENGTH [mm]	DIMENSIONS [mm]
K800LX301	RAL9003 white	3000	18 x 28
K800LX201	RAL9006 silver	3000	18 x 28

PGK


Suspension metallic cable for GK PSV panels.

PRODUCT CODE	LENGTH [mm]
PGK06X002	312

K820


Thermo-acoustic panel to be used with K12, K12C and K12A panels.
Made of polyester fibre with coupled membrane of nonwoven fabric.

Main features

- Density 20 kg/m³
- Thickness 25 mm
- Black colour

On demand, and for minimum quantities, other insulation panel types are available.

PRODUCT CODE	DIMENSIONS [mm]
K820X005	580 x 1180 x 25

Connection components

R986



Polybutylene pipe with anti-oxygen barrier for the panel connection in series between active panels in combination with RC102, RC107 and RC122 push fittings. The pipe section end shall be necessarily completed by the RC900 support sleeve before introduction into the RC push fitting.

On demand, and for minimum quantities, cut pieces of R986 pipe are available and equipped with RC900 support sleeve.

PRODUCT CODE	TYPE	DIMENSIONS [mm]	COIL [m]
R986IY113	Insulated	16 x 1,5	50
R986SY100	Not insulated	12 x 1,5	100
R986SY120	Not insulated	16 x 1,5	100

RC102



Straight push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC102X004	12
RC102X007	16

RC107



Straight push fitting, male threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC107X014	1/2" M	12
RC107X017	1/2" M	16

RC109

Straight push fitting, female threaded for connection between manifold and the panel series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	CONNECTION	PIPE DIAMETER [mm]
RC109X014	1/2" F	12
RC109X017	1/2" F	16

RC122

Angle push fitting for the panel connection in series.

Main features

- Max working pressure 1,6 MPa (16 bar)
- Max working temperature 110°C
- Body made of pressed and nickel plated brass
- Sealing ring in EP
- Blocking toothed ring in AISI 304 stainless steel
- Packed in a protection bag against dust and impurities

PRODUCT CODE	PIPE DIAMETER [mm]
RC122X004	12
RC122X007	16

RC900

Support sleeve for connections made by means of push fittings and plastic material pipe.

PRODUCT CODE	PIPE [mm]
RC900Y011	12 x 1,5
RC900Y016	16 x 1,5


K85RC

Connection kit constituted by a flexible pipe in EPDM with anti-oxygen barrier, having a sleeve in stainless steel mesh, and two fittings.

PRODUCT CODE	CONNECTION TYPE	FITTINGS	LENGTH [mm]
K85RCY001	Panel-panel	2 push fittings size 12 mm	750
K85RCY002	Panel-manifold	1 push fitting size 12 mm and 1 threaded G 1/2" F	400

Dimensions


K60		K120	
Dimensions LxH	596 x 1030	Dimensions LxH	1030 x 1030
K6		K12	
Dimensions LxH	575 x 575	Dimensions LxH	1175 x 575

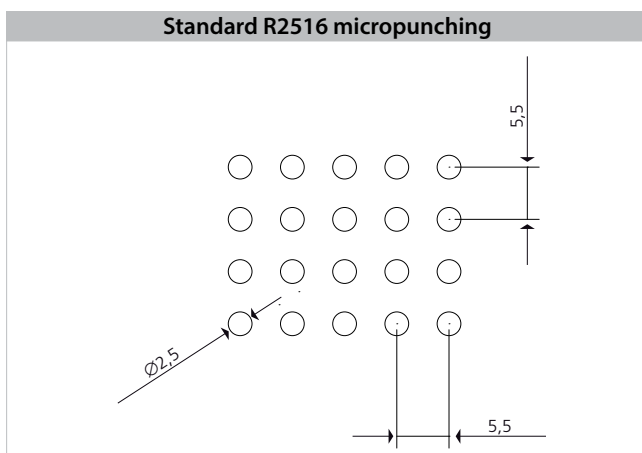

On demand, and for minimum quantities, other micropunching models are available

Standard configuration example for GK60 series

This page reports a standard configuration for the parallel structure (GK60 series ceiling); it is also possible personalizing the solutions according to the specific exigencies.

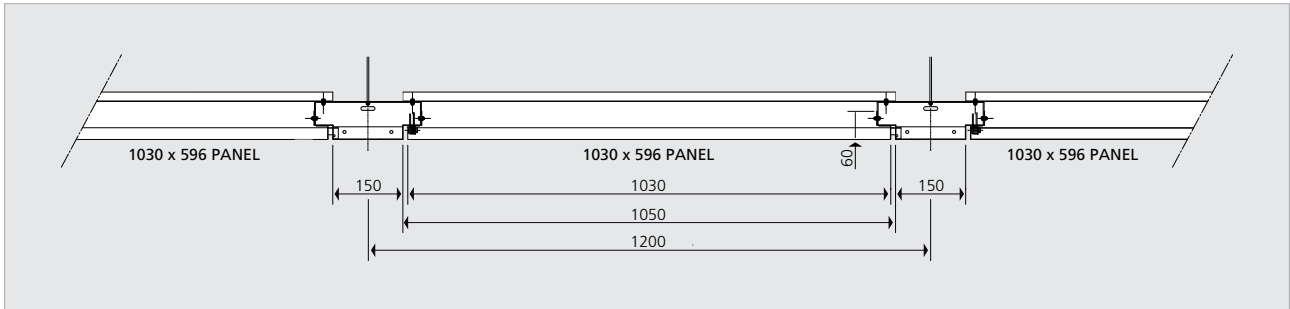


Sectional view of giacoklima® radiant false ceiling GK60 series (parallel structure, carrying elements base 150 mm).

K831: 150x2400 mm carrying element, 150x1800 mm or 150x1200 mm for parallel structure.


K841: 150x1350 mm header for parallel structure; it is the first header of the row (it includes the width of two carrying elements and that one of the panel, see figure), size 150x2400 mm or finally, 150x1200 mm.

K60A/K60C (active) or K60 (inactive): panel size 596x1030 mm.

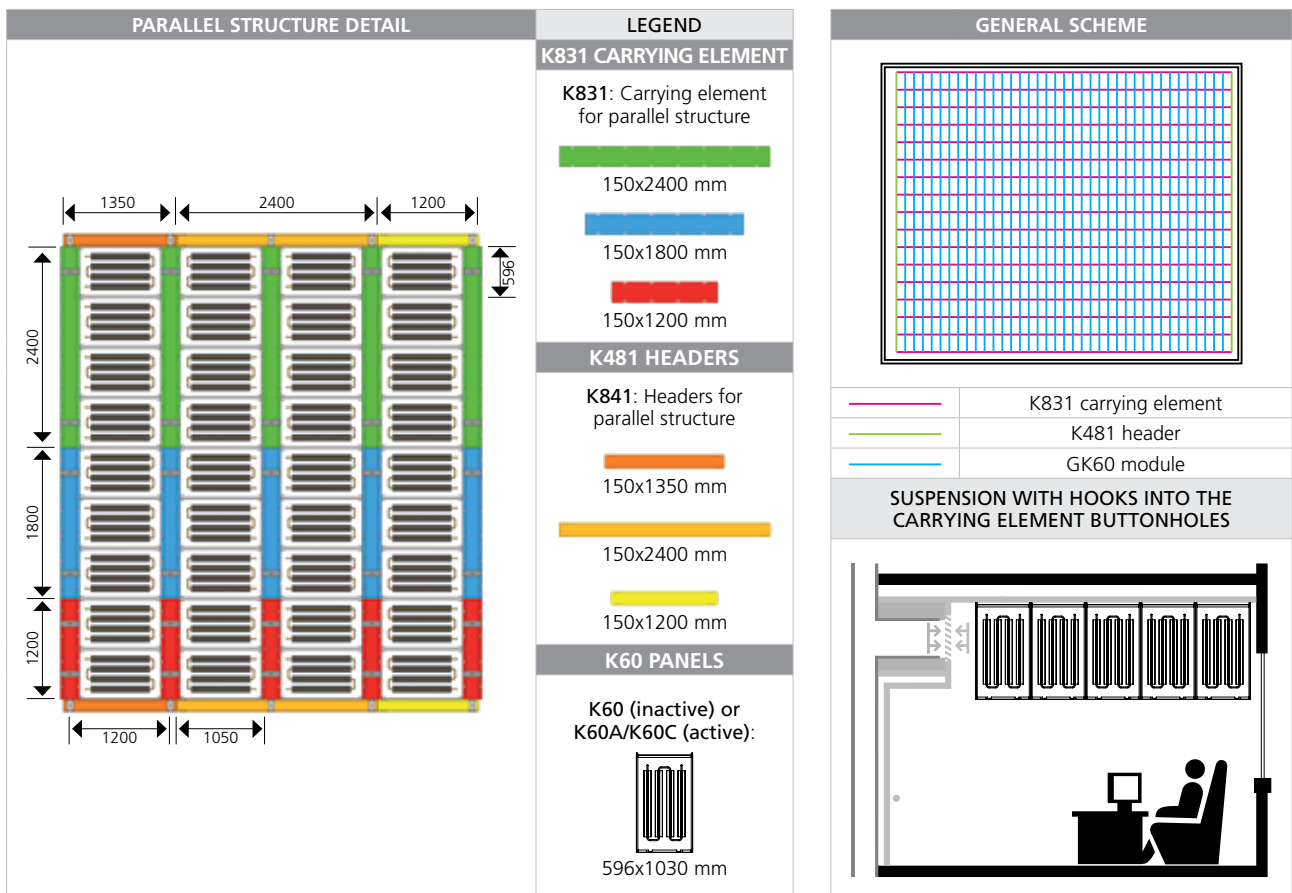

Standard configuration example for GK120 series

This page reports a standard configuration for the crossed structure (GK120 series ceiling); it is also possible personalizing the solutions according to the specific exigencies.

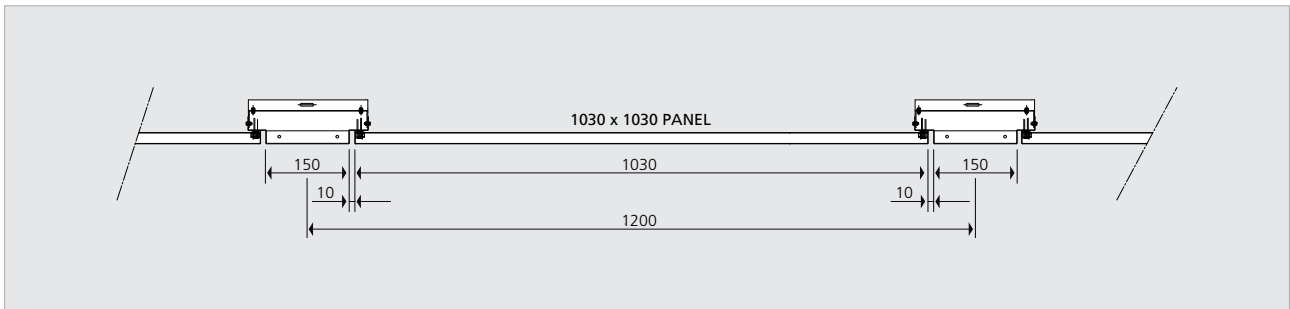

Sectional view of giacoklima® radiant false ceiling GK120 series (crossed structure, carrying elements base 150 mm).


K861: 150x1350 mm header primary carrying element for crossed structure, the header carrying element is the first of the primary carrying elements (see figure).

K851: 150x1200 mm primary carrying element for crossed structure.

K120C/K120A (active) or K120 (inactive): panel size 1030x1030 mm.


K871: secondary carrying element size 150x1050 mm for crossed structure.

Between the panel and the primary carrying element, 1 cm is left to permit the panel opening.

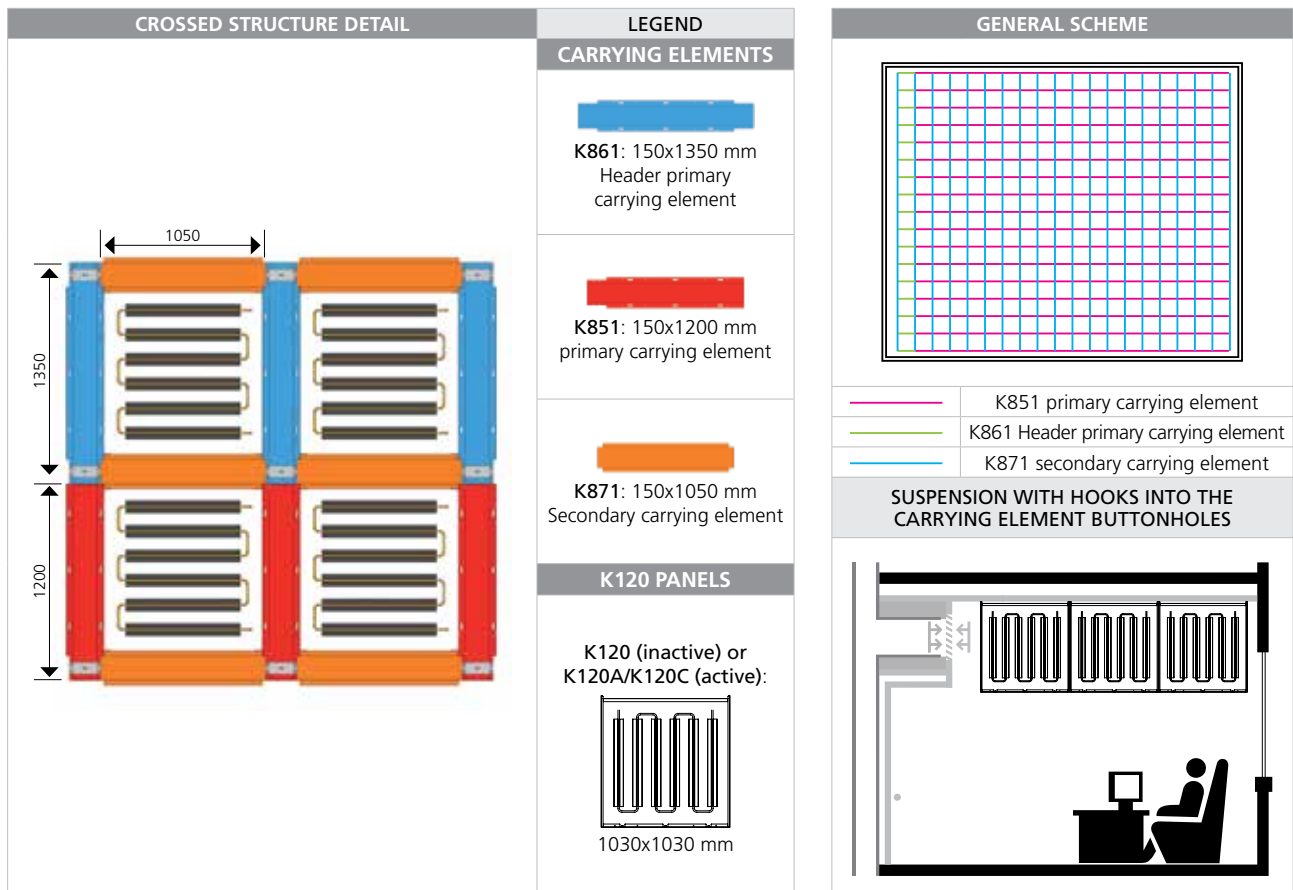





Standard configuration example for GK60x60 PSV series

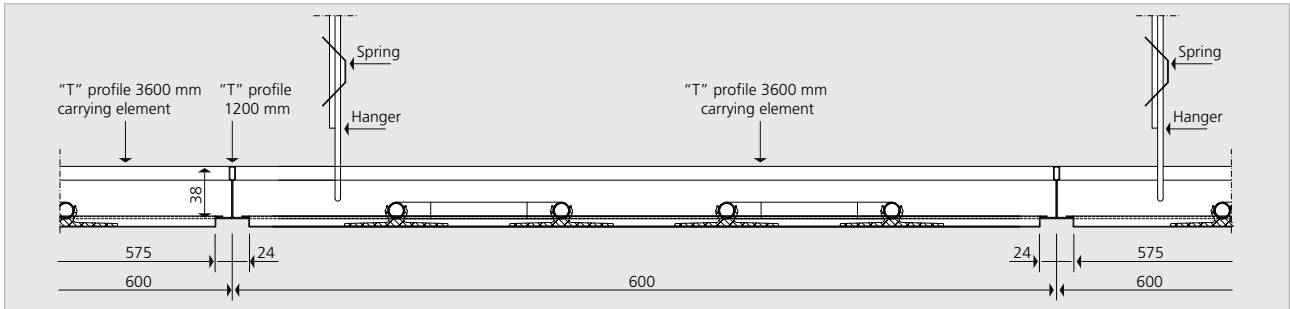This page reports the standard configuration for the "T" shape structure base 24mm (GK60x60 PSV series ceiling).




Configuration of the "T" shape structure, base 24 mm for GK60x60 PSV series.




DETAIL OF THE T SHAPE STRUCTURE BASE 24 MM	LEGEND	
		KSV36X Carrying elements base 24 mm L=3600 mm
		KSV12X Carrying elements base 24 mm L=1200 mm
		KSV6X Carrying elements base 24 mm L=600 mm
		K6C or K6A Active panel 575x575 mm
PANEL SUSPENSION BY MEANS OF CABLES		

Standard configuration example for GK60x120 PSV series

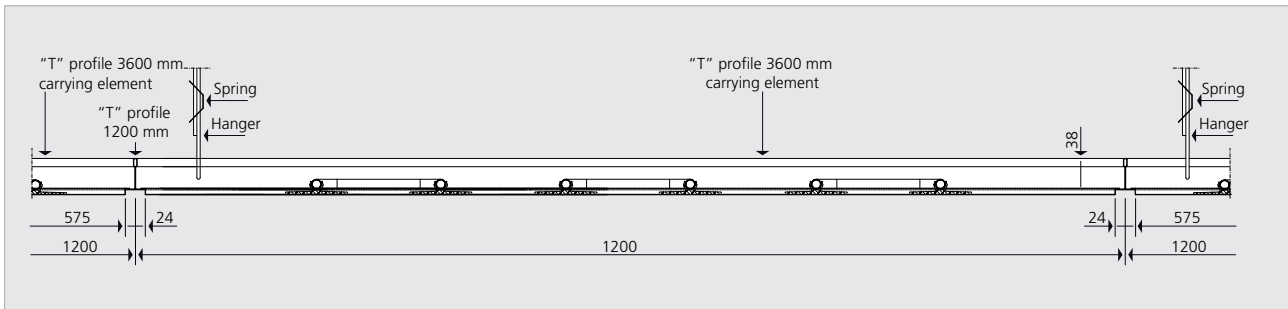This page reports the standard configuration for the "T" shape structure base 24mm (GK60x120 PSV series ceiling).



Configuration of the "T" shape structure, base 24 mm for GK60x120 PSV series.

DETAIL OF THE T SHAPE STRUCTURE BASE 24 MM	LEGEND
	 <p>KSV36X Carrying elements base 24 mm L=3600 mm</p>
	 <p>KSV6X Carrying elements base 24 mm L=600 mm</p>
	 <p>K12C or K12A Active panel 575x1175 mm</p>
PANEL SUSPENSION BY MEANS OF CABLES	

PRODUCT CODE INDEX

PRODUCT CODE	DESCRIPTION	PAGE
K6AX200	K6A panel, module 600x600 mm, RAL9006 silver, micropunched, A220 activation	34
K6AX300	K6A panel, module 600x600 mm, RAL9003 white, micropunched, A220 activation	34
K6CX200	K6C panel, module 600x600 mm, RAL9006 silver, micropunched, C75 activation	33
K6CX300	K6C panel, module 600x600 mm, RAL9003 white, micropunched, C75 activation	33
K6LAX200	K6A panel, module 600x600 mm, RAL9006 silver, plain, A220 activation	34
K6LAX300	K6A panel, module 600x600 mm, RAL9003 white, plain, A220 activation	34
K6LCX200	K6C panel, module 600x600 mm, RAL9006 silver, plain, C75 activation	33
K6LCX300	K6C panel, module 600x600 mm, RAL9003 white, plain, C75 activation	33
K6LX200	K6 panel, module 600x600 mm, RAL9006 silver, plain, inactive	32
K6LX300	K6 panel, module 600x600 mm, RAL9003 white, plain, inactive	32
K6X200	K6 panel, module 600x600 mm, RAL9006 silver, micropunched, inactive	32
K6X300	K6 panel, module 600x600 mm, RAL9003 white, micropunched, inactive	32
K12AX200	K12A panel, module 600x1200 mm, RAL9006 silver, micropunched, A220 activation	40
K12AX300	K12A panel, module 600x1200 mm, RAL9003 white, micropunched, A220 activation	40
K12CX200	K12C panel, module 600x1200 mm, RAL9006 silver, micropunched, C75 activation	39
K12CX300	K12C panel, module 600x1200 mm, RAL9003 white, micropunched, C75 activation	39
K12LAX200	K12A panel, module 600x1200 mm, RAL9006 silver, plain, A220 activation	40
K12LAX300	K12A panel, module 600x1200 mm, RAL9003 white, plain, A220 activation	40
K12LCX200	K12C panel, module 600x1200 mm, RAL9006 silver, plain, C75 activation	39
K12LCX300	K12C panel, module 600x1200 mm, RAL9003 white, plain, C75 activation	39
K12LX200	K12 panel, module 600x1200 mm, RAL9006 silver, plain, inactive	38
K12LX300	K12 panel, module 600x1200 mm, RAL9003 white, plain, inactive	38
K12X200	K12 panel, module 600x1200 mm, RAL9006 silver, micropunched, inactive	38
K12X300	K12 panel, module 600x1200 mm, RAL9003 white, micropunched, inactive	38

PRODUCT CODE INDEX

PRODUCT CODE	DESCRIPTION	PAGE
K60AX501	K60A panel, module 600x1200 mm, RAL9010 white, micropunched, A220 activation	12
K60AX701	K60A panel, module 600x1200 mm, RAL9006 silver, micropunched, A220 activation	12
K60CX501	K60C panel, module 600x1200 mm, RAL9010 white, micropunched, C75 activation	11
K60CX701	K60C panel, module 600x1200 mm, RAL9006 silver, micropunched, C75 activation	11
K60LAX501	K60A panel, module 600x1200 mm, RAL9010 white, plain, A220 activation	12
K60LAX701	K60A panel, module 600x1200 mm, RAL9006 silver, plain, A220 activation	12
K60LCX501	K60C panel, module 600x1200 mm, RAL9010 white, plain, C75 activation	11
K60LCX701	K60C panel, module 600x1200 mm, RAL9006 silver, plain, C75 activation	11
K60LTX511	K60T panel, module 600x1200 mm, RAL9010 white, plain, inactive, with square preblanking 576x576 mm	13
K60LTX711	K60T panel, module 600x1200 mm, RAL9006 silver, plain, inactive, with square preblanking 576x576 mm	13
K60LX501	K60 panel, module 600x1200 mm, RAL9010 white, plain, inactive	10
K60LX701	K60 panel, module 600x1200 mm, RAL9006 silver, plain, inactive	10
K60TX511	K60T panel, module 600x1200 mm, RAL9010 white, micropunched, inactive, with square preblanking 576x576 mm	13
K60TX711	K60T panel, module 600x1200 mm, RAL9006 silver, micropunched, inactive, with square preblanking 576x576 mm	13
K60X501	K60 panel, module 600x1200 mm, RAL9010 white, micropunched, inactive	10
K60X701	K60 panel, module 600x1200 mm, RAL9006 silver, micropunched, inactive	10
K85RCY001	Panel-panel connection kit, EPDM pipe, steel sleeve, 2 fittings, length 750 mm	18, 28, 37, 43
K85RCY002	Panel-manifold connection kit, EPDM pipe, steel sleeve, 2 fittings, length 400 mm	18, 28, 37, 43
K120AX501	K120A panel, module 1200x1200 mm, RAL9010 white, micropunched, A220 activation	22
K120AX502	K120A panel, module 1200x1200 mm, RAL9010 white, plain, A220 activation	22
K120AX701	K120A panel, module 1200x1200 mm, RAL9006 silver, micropunched, A220 activation	22
K120AX702	K120A panel, module 1200x1200 mm, RAL9006 silver, plain, A220 activation	22
K120CX501	K120C panel, module 1200x1200 mm, RAL9010 white, micropunched, C75 activation	21
K120CX502	K120C panel, module 1200x1200 mm, RAL9010 white, plain, C75 activation	21

PRODUCT CODE INDEX

PRODUCT CODE	DESCRIPTION	PAGE
K120CX701	K120C panel, module 1200x1200 mm, RAL9006 silver, micropunched, C75 activation	21
K120CX702	K120C panel, module 1200x1200 mm, RAL9006 silver, plain, C75 activation	21
K120LX501	K120 panel, module 1200x1200 mm, RAL9010 white, plain, inactive	20
K120LX701	K120 panel, module 1200x1200 mm, RAL9006 silver, plain, inactive	20
K120TX521	K120T panel, module 1200x1200 mm, RAL9010 white, micropunched, inactive, with square preblanking 576x576 mm	23
K120TX721	K120T panel, module 1200x1200 mm, RAL9006 silver, micropunched, inactive, with square preblanking 576x576 mm	23
K120X501	K120 panel, module 1200x1200 mm, RAL9010 white, micropunched, inactive	20
K120X701	K120 panel, module 1200x1200 mm, RAL9006 silver, micropunched, inactive	20
K800CX501	K800 "C" shape perimeter profile, RAL9010 white stove enamelled, length 3000 mm	16, 26
K800CX701	K800 "C" shape perimeter profile, RAL9006 silver stove enamelled, length 3000 mm	16, 26
K800LX201	K800 "L" shape perimeter profile, prepainted RAL9006 silver, length 3000 mm	35, 41
K800LX301	K800 "L" shape perimeter profile, prepainted RAL9003 white, length 3000 mm	35, 41
K800LX501	K800 "L" shape perimeter profile, RAL9010 white stove enamelled, length 3000 mm	16, 26
K800LX701	K800 "L" shape perimeter profile, RAL9010 white stove enamelled, length 3000 mm	16, 26
K800SX501	Profilo perimetrale a "S" K800, RAL9010 white stove enamelled, length 3000 mm	16, 26
K800SX701	Profilo perimetrale a "S" K800, RAL9010 white stove enamelled, length 3000 mm	16, 26
K818X001	K818 perforated bar for structure assembly, length 4000 mm	17, 27
K819X001	K819 bracket for K818 perforated bar	17, 27
K820X002	K820 thermo acoustic panel in polyester fibre for K60 panels	17
K820X003	K820 thermo acoustic panel in polyester fibre for K120 panels	25, 27
K820X004	K820 thermo acoustic panel in polyester fibre for K6 panels	35
K820X005	K820 thermo acoustic panel in polyester fibre for K12 panels	41
K831X522	K831 carrying element for parallel structure, module 600x1200 mm, RAL9010 white, 150x1200 mm	14
K831X524	K831 carrying element for parallel structure, module 600x1150mm, RAL9010 white, 100x1200 mm	14

PRODUCT CODE INDEX

PRODUCT CODE	DESCRIPTION	PAGE
K831X532	K831 carrying element for parallel structure, module 600x1200 mm, RAL9010 white, 150x1800 mm	14
K831X534	K831 carrying element for parallel structure, module 600x1150mm, RAL9010 white, 100x1800 mm	14
K831X542	K831 carrying element for parallel structure, module 600x1200 mm, RAL9010 white, 150x2400 mm	14
K831X544	K831 carrying element for parallel structure, module 600x1150mm, RAL9010 white, 100x2400 mm	14
K831X722	K831 carrying element for parallel structure, module 600x1200 mm, RAL9006 silver, 150x1200 mm	14
K831X724	K831 carrying element for parallel structure, module 600x1150mm, RAL9006 silver, 100x1200 mm	14
K831X732	K831 carrying element for parallel structure, module 600x1200 mm, RAL9006 silver, 150x1800 mm	14
K831X734	K831 carrying element for parallel structure, module 600x1150mm, RAL9006 silver, 100x1800 mm	14
K831X742	K831 carrying element for parallel structure, module 600x1200 mm, RAL9006 silver, 150x2400 mm	14
K831X744	K831 carrying element for parallel structure, module 600x1150mm, RAL9006 silver, 100x2400 mm	14
K832X001	K832 bracket for carrying element base 150 mm	14, 25
K832X002	K832 bracket for carrying element base 100 mm	14
K833X001	K833 space cross piece for carrying elements base 150 mm	15
K835X511	K835 stave for lateral compensation, RAL9010 white, 300x200 mm	16, 26
K835X521	K835 stave for lateral compensation, RAL9010 white, 300x300 mm	16, 26
K835X531	K835 stave for lateral compensation, RAL9010 white, 300x400 mm	16, 26
K835X541	K835 stave for lateral compensation, RAL9010 white, 300x500 mm	16, 26
K835X551	K835 stave for lateral compensation, RAL9010 white, 300x600 mm	16, 26
K835X561	K835 stave for lateral compensation, RAL9010 white, 300x700 mm	16, 26
K835X571	K835 stave for lateral compensation, RAL9010 white, 300x800 mm	16, 26
K841X521	K841 header for parallel structure base 150 mm, RAL9010 white, 150x1200 mm	15
K841X523	K841 header for parallel structure base 100 mm, RAL9010 white, 100x1150 mm	15
K841X531	K841 header for parallel structure base 150 mm, RAL9010 white, 150x1350 mm	15
K841X533	K841 header for parallel structure base 100 mm, RAL9010 white, 100x1250 mm	15

PRODUCT CODE INDEX

PRODUCT CODE	DESCRIPTION	PAGE
K841X541	K841 header for parallel structure base 150 mm, RAL9010 white, 150x2400 mm	15
K841X543	K841 header for parallel structure base 100 mm, RAL9010 white, 100x2300 mm	15
K841X721	K841 header for parallel structure base 150 mm, RAL9006 silver, 150x1200 mm	15
K841X723	K841 header for parallel structure base 100 mm, RAL9006 silver, 100x1150 mm	15
K841X731	K841 header for parallel structure base 150 mm, RAL9006 silver, 150x1350 mm	15
K841X733	K841 header for parallel structure base 100 mm, RAL9006 silver, 100x1250 mm	15
K841X741	K841 header for parallel structure base 150 mm, RAL9006 silver, 150x2400 mm	15
K841X743	K841 header for parallel structure base 100 mm, RAL9006 silver, 100x2300 mm	15
K842X001	K842 bracket for header of the parallel structure, for carrying elements base 150 mm	15
K842X002	K842 bracket for header of the parallel structure, for carrying elements base 100 mm	15
K851X501	K851 primary carrying element for crossed structure, RAL9010 white	24
K851X701	K851 primary carrying element for crossed structure, RAL9006 silver	24
K852X001	K852 bracket for primary carrying elements	24
K861X501	K861 header primary carrying element for crossed structure, RAL9010 white	24
K861X701	K861 header primary carrying element for crossed structure, RAL9006 silver	24
K871TX501	K871T secondary carrying element for crossed structure, with preblanking 110x880 mm, RAL9010 white	25
K871TX711	K871T secondary carrying element for crossed structure, with preblanking 110x880 mm, RAL9006 silver	25
K871X501	K871 secondary carrying element for crossed structure, RAL9010 white	24
K871X701	K871 secondary carrying element for crossed structure, RAL9006 silver	24
K891X501	K891 primary carrying element for assembly of GK60 series on crossed structure, RAL9010 white	25
K891X701	K891 primary carrying element for assembly of GK60 series on crossed structure, RAL9006 silver	25
KPOR1X522	KPOR header half-carrying element, RAL9010 white, 50x1200 mm	14
KPOR1X532	KPOR header half-carrying element, RAL9010 white, 50x1800 mm	14
KPOR1X542	KPOR header half-carrying element, RAL9010 white, 50 x 2400 mm	14


PRODUCT CODE INDEX

PRODUCT CODE DESCRIPTION	PAGE
KPOR2X522 KPOR header half-carrying element, RAL9010 white, 75 x 1200 mm	14
KPOR2X532 KPOR header half-carrying element, RAL9010 white, 75 x 1800 mm	14
KPOR2X542 KPOR header half-carrying element, RAL9010 white, 75 x 2400 mm	14
KPOR3X522 KPOR header half-carrying element, RAL9010 white, 100 x 1200 mm	14
KPOR3X532 KPOR header half-carrying element, RAL9010 white, 100 x 1800 mm	14
KPOR3X542 KPOR header half-carrying element, RAL9010 white, 100 x 2400 mm	14
KSTA1X001 KSTA bracket for half-carrying element base 50 mm, parallel structure	15
KSTA2X001 KSTA bracket for half-carrying element base 75 mm, parallel structure	15
KSTA3X001 KSTA bracket for half-carrying element base 100 mm, parallel structure	15
KSV6X200 T shape structure base 24 mm, RAL9006 silver, 600 mm length	33, 39
KSV6X300 T shape structure base 24 mm, bianco RAL 9003, 600 mm length	33, 39
KSV12X200 T shape structure base 24 mm, RAL9006 silver, lungh. 1200 mm	35, 41
KSV12X300 T shape structure base 24 mm, bianco RAL 9003, lungh. 1200 mm	35, 41
KSV36X200 T shape structure base 24 mm, RAL9006 silver, 3600 mm length	35, 41
KSV36X300 T shape structure base 24 mm, bianco RAL 9003, 3600 mm length	35, 41
PGK01X001 PGK assembly kit including 2 springs, 2 washers and 2 springs	17, 27
PGK06X001 PGK suspension chain with hooks	17, 27
PGK06X002 PGK Metallic suspension cable for K6... and K12 panels	35, 41
PGK08X001 M6x10 screw	17, 27
PGK09X001 M6 nut	17, 27
PGK10X001 Washer for M6 screw	17, 27
PGK11X001 Self-threading screw 4,2x9,5, cross cut	17, 27
PGK12X001 Self-threading screw 4,2x13, cross cut	17, 27
R986IY113 R986 polybutylene pipe, insulated, 16x1,5 mm, 50 m coil	19, 29, 36, 42

PRODUCT CODE INDEX

PRODUCT CODE		PAGE
DESCRIPTION		
R986SY100		
R986 polybutylene pipe 12x1,5 mm, 100 m coil		19, 29, 36, 42
R986SY120		
R986 polybutylene pipe 16x1,5 mm, 100 m coil		19, 29, 36, 42
RC102X004		
RC102 straight push fitting for ø 12 mm pipe		18, 28, 36, 42
RC102X007		
RC102 straight push fitting for ø 16 mm pipe		18, 28, 36, 42
RC107X014		
RC107 straight push fitting, 1/2"M threaded for ø 12 mm pipe		18, 28, 36, 42
RC107X017		
RC107 straight push fitting, 1/2"M threaded for ø 16 mm pipe		18, 28, 36, 42
RC109X014		
RC109 straight push fitting, 1/2"F threaded for ø 12 mm pipe		18, 29, 37, 43
RC109X017		
RC109 straight push fitting, 1/2"F threaded for ø 16 mm pipe		18, 29, 37, 43
RC122X004		
RC122 angle push fitting for ø 12 mm pipe		18, 29, 37, 43
RC122X007		
RC122 angle push fitting for ø 16 mm pipe		18, 29, 37, 43
RC900Y011		
RC900 support sleeve, 12x1,5 mm		18, 29, 37, 43
RC900Y016		
RC900 support sleeve, 16x1,5 mm		18, 29, 37, 43

2



GIACOMINI BENELUX SA/NV
Route Provinciale 273-277
1301 Bierges (Wavre)
BELGIUM
+32 10 42 06 50

3



GIACOMINI SA
Via Linoleum 14
6512 Giubiasco (Ticino)
SWITZERLAND
+41 91 850 19 90

4



GIACOMINI ESPAÑA SL
Carretera de Viladrau, Km. 10
Polígono Industrial
Monmany n. 2 - 08553 Seva
(Barcelona)
SPAIN
+34 93 884 10 01

5



GIACOMINI PORTUGAL LDA
Rua de Martinhaes, 263
4485-188 Gao
(Vila Do Conde)
PORTUGAL
+35 122 928 6860

6



GIACOMINI SALES UK LTD
Unit 3, Goodrich Close,
Westerleigh Business Park,
Yate BS37 5YS
UK
+44 1454 311 012

7



GIACOMINI LATINO AMERICA
Ombu 34 (Ex 2881)
Don Torcuato Tigre 1611
Buenos Aires
ARGENTINA
+54 11 4727 2620



1



GIACOMINI S.p.A.
28017
S. Maurizio d'Opaglio - NO
ITALY
+39 0322 923 111


GIACOMINI BRANCHES AND REPRESENTATIVES IN THE WORLD

Country	Area manager
Albania	Casoni Federico
Algeria	Gotti Andrea
United Arab Emirates	Gotti Andrea
Argentina	Giacomini Latinoamerica
Armenia	Tartaglia Gianluca
Australia	Giacomini China
Austria	Giacomini Germany
Azerbaijan	Tartaglia Gianluca
Bahrain	Gotti Andrea
Belgium	Giacomini Benelux
Belarus	Tartaglia Gianluca
Bosnia-Herzeg.	Casoni Federico
Brazil	Giacomini Latinoamerica
Bulgaria	Casoni Federico
Canada	Mori Daniela

Country	Area manager
Chile	Giacomini Latinoamerica
China	Giacomini China
Cyprus	Casoni Federico
Colombia	Giacomini Latinoamerica
Costa Rica	Giacomini Latinoamerica
Croatia	Casoni Federico
Czech Republic	Giacomini Czech
Denmark	Dulio Pietro
Dominican Republic	Giacomini Latinoamerica
Egypt	Gotti Andrea
Estonia	Tartaglia Gianluca
Finland	Tartaglia Gianluca
France	Giacomini France
Georgia	Tartaglia Gianluca
Germany	Giacomini Germany

Country	Area manager
Greece	Casoni Federico
Ghana	Gotti Andrea
Hong Kong	Giacomini China
Hungary	Casoni Federico
India	Giacomini India
Iran	Gotti Andrea
Ireland	Tartaglia Gianluca
Iceland	Tartaglia Gianluca
Israel	Gotti Andrea
Japan	Giacomini China
Jordan	Gotti Andrea
Kazakistan	Tartaglia Gianluca
Korea	Giacomini China
Kuwait	Gotti Andrea
Kyrgyzstan	Tartaglia Gianluca
Latvia	Tartaglia Gianluca

8




GIACOMINI CZECH S.R.O.
 P.O. Box 18 - Erbenova 15
 466 01 Jablonec Nad Nisou
CZECH REPUBLIC
 +420 483 736 060

9




GIACOMINI GMBH
 Industriestraße 10
 51545 Waldbroel
GERMANY
 +49 2291 790 236

10



DOMTECH GIACOMINI S.A.O.
 Dolné Rudiny 1
 010 91 Zilina
SLOVAK REPUBLIC
 +421 417 64 52 23

11



GIACOMINI S.A.
 Rondé Point de l'Europe,
 BP 97 - 77348
 Pontault Combault Cedex
FRANCE
 +33 1 60 29 20 35

12



GIACOMINI CHINA
 Beijing office
 Room A801, TYG Centre,
 No.2 Dong San Huan Bei Lu Bing,
 100027 Chaoyang District,
 Beijing,
CHINA
 +86 10 8486 1901
 +86 10 8486 2775

13



GIACOMINI INDIA
 G-3, Neel Madhav,
 Nr. Navmeet Hospital,
 V.P. cross road, Mulund (west),
 Mumbai, Maharashtra-400080,
INDIA
 +91 22 2167 6767
 +91 22 2167 6733



GIACOMINI BRANCHES AND REPRESENTATIVES IN THE WORLD

Country	Area manager	Country	Area manager	Country	Area manager
Lithuania	Tartaglia Gianluca	Panama	Giacomini Latinoamerica	Switzerland	Giacomini Switzerland
Luxembourg	Giacomini Benelux	Peru	Giacomini Latinoamerica	Thailand	Giacomini China
Macedonia	Casoni Federico	Philippines	Giacomini China	Tunisia	Gotti Andrea
Malaysia	Giacomini China	Poland	Gagliardi Luca	Turkey	Casoni Federico
Malta	Casoni Federico	Portugal	Giacomini Portugal	Ukraine	Tartaglia Gianluca
Mauritius	Gotti Andrea	Qatar	Gotti Andrea	United Kindom	Giacomini UK
Mexico	Giacomini Latinoamerica	Romania	Casoni Federico	United States of America	Mori Daniela
Moldavia	Tartaglia Gianluca	Russia	Tartaglia Gianluca	Uruguay	Giacomini Latinoamerica
Mongolia	Giacomini China	Saudi Arabia	Gotti Andrea	Uzbekistan	Tartaglia Gianluca
Montenegro	Casoni Federico	Serbia	Casoni Federico	Venezuela	Giacomini Latinoamerica
Nigeria	Gotti Andrea	Singapore	Giacomini China	Vietnam	Giacomini China
Norway	Tartaglia Gianluca	Syria	Tartaglia Gianluca	Yemen Rep.	Gotti Andrea
Netherlands	Giacomini Benelux	Slovakia	Domtech Giacomini	Yvory Coast	Gotti Andrea
New Zealand	Giacomini China	Slovenia	Casoni Federico		
Pakistan	Gotti Andrea	Spain	Giacomini Spain		
Palestine	Gotti Andrea	Sweden	Tartaglia Gianluca		

GENERAL SALE CONDITIONS

ORDERS

All orders are intended as reservation and they do not bind our company to deliver, even partial of what has been ordered.

PRICES

The prices are those ones in force at the consignment time and are not binding.

CONSIGNMENTS

They are always made carriage forward, unless special agreements on the contrary. The goods runs at the committee's risk and danger, even if delivered to the customer, and we consider us relieved of any responsibility for shortage and damages. The consignments are done with the available mean at the moment and the customer indications have value of simple recommendation.

PACKAGING

The packaging is invoiced at the pure cost, and are not accepted as return.

RETURN

Returned goods are not accepted without our preventive authorization and in any case only in free port.

CLAIMS

They are valid only within 8 days from the goods receipt.

PAYMENTS

The conditions are those one indicate in the offers and in the commissions and are not binding. After the agreed expiration date, the interests on arrears will be calculated according to the bank rate taking place at the date agreed for the payment. The delayed payment authorize us to suspend, without any notice, the supplies under progress.

STAMPS

Stamps are at customer charge.

MODIFICATIONS

Our company reserves to bring, without any notice, any modification that would be technically necessary.

PLACE OF JURISDICTION

In case of controversy, only the competence of Novara Law Court is recognized.



QUALITY CERTIFICATIONS



FURTHER INFORMATION

The technical documentation and the product specifications of the giacoklima® radiant ceiling system are available also in electronic format on www.giacomini.com/ceiling

For further information about giacoklima® radiant ceilings, consult also the Technical Manual 0138EN and the brochure "References" 0300EN. For information about other Giacomini components and systems, ask for the last issue of the general catalogue.

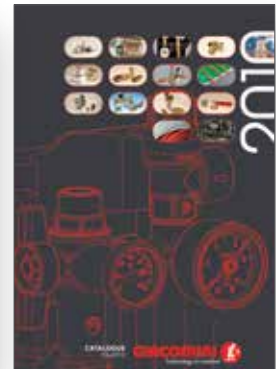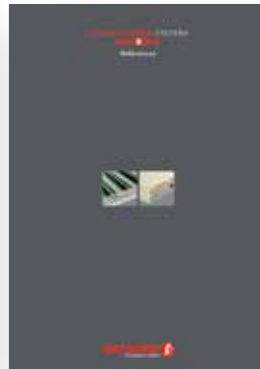

SEPTEMBER 2010

This communication is for information purposes. Giacomini S.p.A. reserves the right to make at any moment, without prior notice, modifications for technical or commercial reasons to the items contained hereby. The information of this technical communication does not exempt the user from strictly following existing good practice regulations and standards. Even partially reproducing this content is forbidden, unless authorized.



Via per Alzo 39
28017 San Maurizio d'Opaglio (NO) - ITALY
tel +39 0322 923 111 - fax +39 0322 96 256
info@giacomini.com - www.giacomini.com